

RESIDENTIAL PRODUCTS CATALOG 03.26



Thank goodness for Goodman®.

Thank goodness for Goodman.®





Air Conditioning & Heating

RESIDENTIAL PRODUCTS CATALOG

Split Systems 7

Air Conditioners (R-32)

GXV9S	Up to 19.0 SEER2	8
GLXT7C	Up to 17.2 SEER2	9
GXV6S	Up to 17.2 SEER2	10
GLXS5B	Up to 16.5 SEER2	11
GLXS4M	Up to 15.2 SEER2	12
GLXS4B	Up to 15.2 SEER2	13
GLXS3B	Up to 15 SEER2	14

Heat Pumps (R-32)

GZV9S	Up to 21.0 SEER2 Up to 10.0 HSPF2	15
GZV7S	Up to 19.0 SEER2 Up to 8.8 HSPF2	16
GZV6S	Up to 19.0 SEER2 Up to 8.8 HSPF2	17
GLZT7B	Up to 17.5 SEER2 Up to 8.2 HSPF2	18
GLZS5B	Up to 16 SEER2 Up to 8.2 HSPF2	19
GLZS4M	Up to 15.2 SEER2 Up to 7.8 HSPF2	20
GLZS4B	Up to 15.2 SEER2 Up to 7.8 HSPF2	21

Gas Furnaces 22

90+% AFUE Gas Furnaces (R-32)

GRVM97	Up to 97% AFUE	23
GDVM97	97% AFUE	24
GRVT96 & GDVT96	Up to 97.5% AFUE	25
GRVS96-U	Up to 96% AFUE	26
GR9S96-U	Up to 92% AFUE	27
CDVS96	Up to 96% AFUE	28
GR9T96	Up to 96% AFUE	29
GD9T96	Up to 96% AFUE	30
GR9S96	Up to 97% AFUE	31
GD9S96	Up to 96% AFUE	32
GR9S92	Up to 92% AFUE	33

80% AFUE Gas Furnaces (R-32)

GRVT80 & GDVT80	80% AFUE	34
GRVS80-U	80% AFUE	35
GR9S80-U	80% AFUE	36
GR9T80	80% AFUE	37
GD9T80	80% AFUE	38
GR9S80	80% AFUE	39
GD9S80	80% AFUE	40

Air Handlers & Evaporator Coils 41

MBVB	Multi-Position Modular Blowers	42
115V MBVK	Multi-Position Modular Blowers	43

Air Handlers (R-32)

AHVE (230V)	Multi-Position, Variable-Speed	44
AHVE (115V)	Multi-Position, Variable-Speed	45
AMST*13	Multi-Position	46
AWST*13	Wall-Mount	47
AMVT*13	Multi-Position, Variable-Speed	48
ACST*13	Ceiling-Mount	49
MBVK*H	Multi-Position Modular Blowers	50

Evaporator Coils (R-32)

CAPFA*3	Cased Indoor "A" Coil, Upflow/Downflow	51
CAHEA	Cased Indoor "A" Coil, Multi-Position	52
CAPTA*3	Cased Indoor "A" Coil, Upflow/Downflow	53
CHPTA*3	Cased Indoor "A" Coil, Horizontal	54
CAPEA*3**	Cased Indoor Coil, Upflow/Downflow	55
CHPEA*3**	Cased Indoor Coil, Horizontal	56
CAUTA	Uncased Indoor Coil, Upflow/Downflow	57
CSCT	Cased Indoor Coil, Horizontal Slab	58

Packaged Units 59

Air Conditioners (R-32)

GPCH3	Up to 13.4 SEER2	60
GPCM3	Up to 13.4 SEER2	61

Heat Pumps (R-32)

GPHH5	Up to 15.2 SEER2 6.7 HSPF2	62
GPHM5	Up to 15.2 SEER2 6.7 HSPF2	63
GPHH3	Up to 13.4 SEER2 6.7 HSPF2	64
GPHM3	Up to 13.4 SEER2 6.7 HSPF2	65

Gas/Electric (R-32)

GPGM5	Up to 15.2 SEER 81% AFUE	66
GPGM3	Up to 13.4 SEER2 81% AFUE	67
GPUM3	Up to 13.4 SEER2 81% AFUE	68

Controls & Thermostats 69

Goodman GTST connected thermostat	70
PSP Universal Smart Wi-Fi Thermostats	71

Indoor Air Quality (IAQ) 72

Clean Comfort IAQ solutions

Our continuing commitment to quality products may mean a change in specifications without notice.

©2026 **DAIKIN COMFORT TECHNOLOGIES MANUFACTURING, L.P.** • Houston, Texas • Printed in the USA.

THE RIGHT CHOICE



Goodman brand — The right choice for millions and millions of people

For over three decades, the Goodman brand has concentrated on something more important than simple brand-recognition consumer advertising. And that's the design, engineering, and manufacture of dependable products that have helped millions and millions of homeowners achieve reliable, high-quality, and affordable indoor comfort. In addition, the Goodman brand has earned the loyalty and respect of thousands of local independent heating and cooling professionals across North America.

We believe that you, a local HVAC (Heating, Ventilation and Air Conditioning) professional, knows best about the specific indoor comfort needs and indoor air quality solutions of your customers. When you recommend a Goodman brand product, rest assured that customer will soon be receiving great indoor comfort, at a refreshingly affordable price.

Time-tested performance

The efficient movement of heat is a basic premise of the HVAC industry. Whether it's the removal of heat in conjunction with cooling products or the creation of heat for warmth, the HVAC world revolves around the thermodynamics of heat transfer. As you may know, the Goodman brand is recognized as a heat transfer expert. Investing in research and development is integral to the Goodman brand's success.






Goodman products offer a wide array of product features and enhancements that reinforce the durability and reliability of the entire Goodman brand product line, such as:

- High-efficiency air conditioners and heat pumps with the Goodman brand's SmartCoil™ condensing coil — our most advanced 5mm copper tube and aluminum fin combination available
- ComfortBridge™ Technology Compatible – Continuously monitors system performance for customized indoor comfort
- All-aluminum evaporator coils
- Heat pumps that include more standard features than previous models

Committed to quality

There's good reason that thousands of the nation's HVAC professionals recommend the Goodman brand. Dealers are completely comfortable that Goodman brand products will keep their customers satisfied and enhance their reputation. Goodman brand manufacturing facilities are ISO 9001-certified, an independent standard accepted worldwide as the benchmark for quality manufacturing and management processes, and ISO 14001-certified, an international environmental certification.

Goodman is focused on a few basic goals: build more reliable, longer-lasting products than anyone else; make durable cooling and heating products and systems as affordable as possible; and design everything for quick, trouble-free installations. Those values have led the Goodman brand this far and they will lead it into the future.

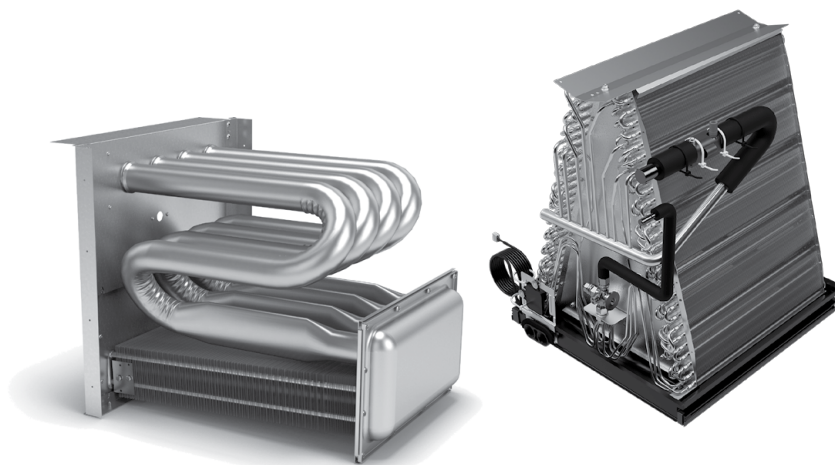

REGIONAL EFFICIENCY STANDARDS


Labeling

There are two methods to help identify products subject to regional standards. The first is the EnergyGuide label that is noticeably different, with the inclusion of the map of the United States that identifies where the equipment can be installed.

The second is a separate statement that will be on the rating plate or on a label next to the rating plate called the “Install Prohibited” statement. All products subject to regional standards have both the EnergyGuide label and the Install Prohibited statement.

NOTE: The Federal Trade Commission (FTC) originally required a range of SEER be placed on Split System products subject to regional efficiency standards. However, they reversed their decision and now only a single value is listed (since mid-2017). Products in inventory may have mixed EnergyGuide labels (some having a range, others having a single value for SEER). FTC does not require re-labeling of existing product.

EnergyGuide Labels Currently In Effect

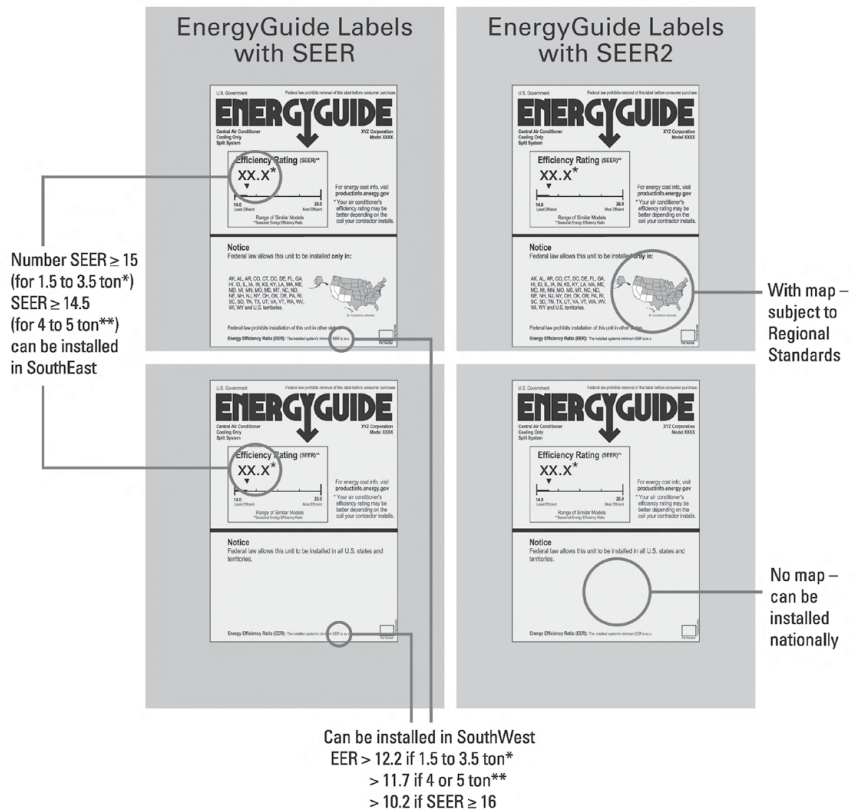


The newest U.S. Department of Energy (DOE) minimum efficiency changes go into effect on January 1, 2024, affecting all residential air conditioners and heat pumps we manufacture. The changes maintain regional standards that apply to Split System and Package Air Conditioners, with all metrics now based on the new metrics (SEER2/EER2/HSPF2). The DOE minimum efficiency standards include both national standards (which are based on date of manufacture) and regional standards (which are based on date of installation).

National Standards

- » Split system heat pumps (14.3 SEER2 / 7.5 HSPF2)
- » Single package air conditioner (13.4 SEER2)
- » Single package gas/electric heat pumps (13.4 SEER2 / 81% AFUE)
- » Single package gas/electric heat pumps (13.4 SEER2 / 6.7 HSPF2)

Regional Efficiency Standards

Only air conditioners (both split system and single package) are subject to regional efficiency standards. The map to the right summarizes the national and regional efficiency standards.

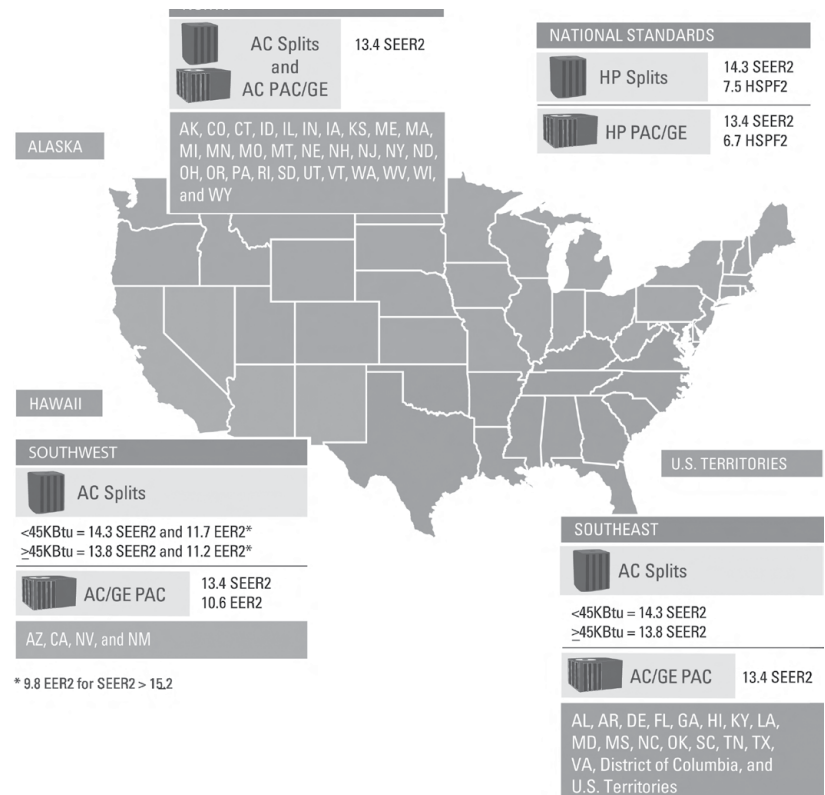

What You Need to Know as a Distributor

DOE defines a distributor as “a person (other than a manufacturer or retailer) to whom a consumer product is delivered or sold for purposes of distribution in commerce.” Therefore, if you resell product for sale other than to an end user, you may be considered a distributor as opposed to a contractor or dealer (see definitions below).

Distributors are required to comply with the requirements:

1. Do not knowingly sell product that will be installed in violation of regional standards.
2. Conduct regional standards training for all employees and customers.
3. Maintain records for all units subject to the regional standards for a period of 54 months. These records are to include the outdoor unit manufacturer, model number, serial number, date of purchase, date of sale, customer name and delivery address if delivered.

What You Need to Know as a Contractor/Dealer

As a contractor or dealer, you will also be required to adhere to requirements of the DOE HVAC Regional Standards Enforcement Rules. DOE has defined a contractor as “a person (other than the manufacturer or distributor) who sells to and/or installs for an end user a central air conditioner subject to regional standards.” DOE has defined a dealer as “a type of contractor, generally with a relationship with one or more specified manufacturers.”

The contractor/dealer requirements include the following:

1. Do not knowingly install product that is in violation of regional standards.
2. Conduct regional standards training for all employees.
3. Maintain records for all units subject to the regional standards for a period of 48 months. These records to include the indoor and outdoor unit manufacturer and model number, outdoor unit serial number, distributor purchased from, date and address of installation.

Also important is that DOE defines “installation of a central air conditioner” as “the connection of the refrigerant lines and/or electrical systems to make the central air conditioner operational.”

Enforcement

Enforcement of the standards will be at least partially via complaints registered with the DOE. DOE has set up an email for reporting suspected violations directly to them at EnergyEfficiencyEnforcement@doe.gov, or suspected violations can be reported by phone, at (202) 287-6997.

All verified violations will require remediation and can result in stiff fines. Notices of Violation will be posted publicly by the DOE. Further, if a distributor or contractor/dealer is found to routinely violate the standards, manufacturers can be prohibited from selling products to that party.

Contractors, dealers and distributors should be aware that the DOE may request copies of documentation proving product sales and installations are in compliance. Records requested by DOE must be provided within 30 days.

Questions

Questions about the efficiency standards can be emailed to RegionalStandardsQuestions@daikincomfort.com.

IMPORTANT NOTE:

The information provided is a summarized overview and is not intended to provide a complete description of the DOE Regional Standards. For more information regarding the DOE Regional Standards and the enforcement of these standards, please visit: www.energy.gov/gc/legal-resources/office-assistant-general-counsel-enforcement/regional-standards-enforcement



GOODMAN BRAND PRODUCT TECHNOLOGY

SmartShift® Heat Pump Defrost Control



The SmartShift Heat Pump Defrost Control helps to increase compressor reliability and reduces the noise level during the heat pump system defrost cycle. When outdoor temperatures fall below freezing and the heat pump is forced to initiate a defrost cycle, SmartShift simply turns off the compressor for 30 seconds allowing the system pressure to equalize and then it restarts the compressor. This seamless operation is triggered automatically eliminating unwanted noise caused by heat pump defrost changeover cycles.

SmartFrame™



At the core of our newly designed Air Handlers is the SmartFrame™

inner skeleton. It adds lateral stability to the chassis, provides a mounting location for all internal components, and provides additional insulation retention. Our insulation retention solution eliminates all adhesives from the cabinet insulation, which is secured through mechanical means by the SmartFrame sub-structure and additional retaining rods strategically placed near the blower assembly.

All Aluminum Coil



The All Aluminum evaporator coil is constructed from aluminum tubing, fins and panels to give you a single metal solution for outstanding, time-tested heat transfer performance properties. If you're looking for an evaporator coil that offers enhanced performance (as tested in Goodman labs), this is the product for you.


ComfortBridge™



When your new air conditioner or heat pump is paired with a Goodman brand gas furnace with ComfortBridge technology, performance data from the split system is gathered and used to make automatic adjustments that may help reduce the amount of energy used to cool your home.

Always in pursuit of innovative ideas, our engineers have designed ComfortBridge technology to help your entire HVAC system cost-effectively operate at peak performance — providing consistent energy-efficient home comfort. ComfortBridge technology works with any single-stage thermostat to help create customized indoor comfort specifically for you and your family.

CoolCloud™



The CoolCloud app allows qualified service technicians to wirelessly connect to, configure, and troubleshoot select Goodman brand HVAC systems. Once registered and securely paired with an air handler or gas furnace equipped with the ComfortBridge control system, the HVAC system communicates data wirelessly to a smartphone or tablet.

Clean Comfort®

CLEAN COMFORT® INDOOR AIR ESSENTIALS

Easily installed in new or existing heating and cooling systems, Clean Comfort whole-home solutions work invisibly, silently and automatically to treat the air in your entire home. Whatever your indoor air issue may be, Clean Comfort has a whole-house solution that can help. www.cleancomfort.com



SPLIT SYSTEMS

GXV9S | VARIABLE SPEED AIR CONDITIONER

UP TO 19 SEER2 | HIGH-EFFICIENCY, VARIABLE-SPEED, INVERTER DRIVEN

	GXV9S A2410A*	GXV9S A3610A*	GXV9S A4810A*	GXV9S A6010A*
CAPACITIES (AHRI RATED)				
Max. Cooling (BTU/h)	23,200	35,000	46,500	53,500
AMBIENT OPERATION RANGE Cooling (°FDBB(°CDB))	0 to 115 (-17.8 to 46.1)			
COMPRESSOR				
Type	Swing	Swing	Swing	Swing
CONDENSER FAN MOTOR				
Horsepower	0.20	0.36	0.36	2 x 0.32
REFRIGERATION SYSTEM				
Refrigerant Line Size ¹				
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	7/8"	1 1/8"	1 1/8"	1 1/8"
Refrigerant Connection Size				
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	7/8"	7/8"	7/8"	7/8"
Valve Connection Type	Front Sealing	Front and Back Sealing	Front and Back Sealing	Front and Back Sealing
Refrigerant Charge (oz.)	76	100	118	162
Expansion Device	EEV	EEV	EEV	EEV
Superheat at Service Valve	Auto-control	Auto-control	Auto-control	Auto-control
Subcooling at Service Valve	14±1°F	8±1°F	9±1°F	11±1°F
ELECTRICAL DATA				
Voltage / Phase (60 Hz)	208-230/1	208-230/1	208-230/1	208-230/1
Fan/Compressor Inverter Drive Input	17.6	25.4	30	24.5
Minimum Circuit Ampacity ²	22.4	31.8	37.5	34.4
Max. Overcurrent Protection ³	25	35	40	40
Min / Max Volts	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
EQUIPMENT WEIGHT (LBS)	129	163	174	236
SHIP WEIGHT (LBS)	143	183	196	271

¹ Tested and rated in accordance with ANSI/AHRI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.

• Unit is charged with refrigerant for 15' of 3/4" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
(See table below for allowable line set diameter)

Standard Features

- Variable-speed swing compressors
- Quiet digitally commutated fan motor
- High-density compressor sound blanket
- Compatible with Goodman connected thermostat and other Goodman communicating equipment
- Proprietary control algorithmic logic
- In communicating mode, only two low-voltage wires to outdoor unit required
- Diagnostic indicator lights, seven-segment
- LED display, and fault code storage
- Proprietary Inside intelligence for diagnostics
- Quiet-mode- provides enhanced acoustical comfort, up to 3 different sound levels (as low as 45 dBA)
- Field-selectable boost mode increases compressor speed during unusually high loads
- Field-installed filter drier
- Coil and ambient temperature sensors
- Suction pressure transducer
- Sweat connection service valves with easy access to gauge ports
- AHRI Certified; ETL Listed

Cabinet Features

- Heavy-gauge galvanized steel cabinet with grille-style sound control side design
- Custom Ivory white powder-paint finish
- High corrosion-resistant (ZAM®), unpainted steel bottom frame and legs
- 500-hour salt-spray tested
- Wire fan discharge grille
- Top and side maintenance access
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)

R32

10 YEAR
REPLACEMENT
LIMITED
WARRANTY*

10 YEAR
PARTS
LIMITED
WARRANTY*

ONE-TIME
COMPRESSOR
REPLACEMENT
IN YEARS 11-99
OFFERED BY ASURE†

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Unit Replacement Limited Warranty and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

† One-time Compressor Replacement coverage is available to the original homeowner for years 11-99 after the installation date through an **ASURE** Extend Service Plan. Complete details about the Extended Service Plan options available from your **ASURE** dealer.



GLXT7C (R-32) | SPLIT SYSTEM AIR CONDITIONER

UP TO 17.2 SEER2 | HIGH-EFFICIENCY, VARIABLE-SPEED, INVERTER DRIVEN

Model	Nominal Capacity (Tons)	Voltage-Phase	Dimensions			Service Valve		dBs	Ship Weight (lbs)
			W"	D"	H"	Liquid"	Suction"		
GLXT7C2410A*	2	208/230-1	35½	35½	39½	3/8"	3/4"	69.0	219
GLXT7C3610A*	3	208/230-1	35½	35½	39½	3/8"	3/4"	70.0	221
GLXT7C4810A*	4	208/230-1	35½	35½	41⅝	3/8"	7/8"	73.0	281
GLXT7C6010A*	5	208/230-1	35½	35½	41⅝	3/8"	7/8"	75.0	288

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Two-Stage Copeland Ultra-Tech scroll compressor
- Quiet two-speed ECM outdoor fan motor
- Integrated communicating ComfortBridge™ Technology
- Commissioning and diagnostics via Bluetooth indoor board via CoolCloud™ App
- Copeland® ComfortAlert™ built in diagnostics
- Copper tube/enhanced aluminum fin coil - 5mm on 2.0-3.0T
- Color-coded terminal strip for non-communicating set-up
- Only two low-voltage wires required in communication mode
- Factory-installed filter drier
- Factory-installed transformerFactory-installed high and low-pressure switches
- High-density foam compressor sound blanket
- Fully charged for 15' of tubing length
- Ambient temperature sensors
- Ground lug connection
- AHRI Certified - ETL Listed

Cabinet Features

- Removable grille-style top design compliant with UL 60335-2-40
- Venturi for increased velocity of airflow
- Heavy-gauge galvanized steel cabinet
- Baked-on powder-paint finish with 500-hour salt-spray approval
- Steel louver coil guard with rust-resistant screws.
- Top and side maintenance access
- Single-panel access to controls with space for field-installed accessories
- Service valves with sweat connections and easy-access gauge ports
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



R32

10 YEAR UNIT REPLACEMENT LIMITED WARRANTY*

10 YEAR PARTS LIMITED WARRANTY*

ONE-TIME COMPRESSOR REPLACEMENT IN YEARS 11-99 OFFERED BY ASURE†

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Unit Replacement Limited Warranty and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

† One-time Compressor Replacement coverage is available to the original homeowner for years 11-99 after the installation date through an ASURE Extend Service Plan. Complete details about the Extended Service Plan options available from your ASURE dealer.

GXV6S (R-32) | SPLIT SYSTEM AIR CONDITIONER

UP TO 17.2 SEER2 | HIGH-EFFICIENCY, VARIABLE-SPEED, INVERTER DRIVEN

	GXV6S S1810A*	GXV6S S2410A*	GXV6S S3010A*	GXV6S S3610A*	GXV6S S4210A*	GXV6S S4810A*	GXV6S S6010A*	GXV6S A1810A*	GXV6S A2410A*	GXV6S A3010A*	GXV6S A3610A*
CAPACITIES (AHRI RATED)											
Max. Cooling (BTU/h)	17,100	23,200	28,400	34,200	41,000	45,500	53,500	17,100	23,200	28,400	33,000
AMBIENT OPERATION RANGE Cooling (°FDB[°CDB])	0 to 115 (-17.8 to 46.1)										
COMPRESSOR											
Type	Swing	Swing	Swing	Swing	Swing	Swing	Swing	Swing	Swing	Swing	Swing
CONDENSER FAN MOTOR											
Horsepower	0.09	0.09	0.20	0.20	0.36	0.36	0.36	0.09	0.09	0.20	0.20
REFRIGERATION SYSTEM											
Refrigerant Line Size ¹											
Liquid Line Size [“O.D.]	3/8”	3/8”	3/8”	3/8”	3/8”	3/8”	3/8”	3/8”	3/8”	3/8”	3/8”
Suction Line Size [“O.D.]	3/4”	3/4”	7/8”	7/8”	1 1/8”	1 1/8”	1 1/8”	3/4”	3/4”	7/8”	7/8”
Refrigerant Connection Size											
Liquid Valve Size [“O.D.]	3/8”	3/8”	3/8”	3/8”	3/8”	3/8”	3/8”	3/8”	3/8”	3/8”	3/8”
Suction Valve Size [“O.D.]	3/4”	3/4”	7/8”	7/8”	7/8”	7/8”	7/8”	3/4”	3/4”	7/8”	7/8”
Valve Connection Type	Front Sealing	Front Sealing	Front Sealing	Front Sealing	Front and Back Sealing	Front and Back Sealing	Front and Back Sealing	Front Sealing	Front Sealing	Front Sealing	Front Sealing
Refrigerant Charge (oz.)	74	74	76	83	100	100	118	74	74	76	83
Expansion Device	EEV	EEV	EEV	EEV	EEV	EEV	EEV	EEV	EEV	EEV	EEV
Superheat at Service Valve	Auto-control 10±1°F	Auto-control 12±1°F	Auto-control 14±1°F	Auto-control 15±1°F	Auto-control 8±1°F	Auto-control 9±1°F	Auto-control 9±1°F	Auto-control 10±1°F	Auto-control 12±1°F	Auto-control 14±1°F	Auto-control 13±1°F
Subcooling at Service Valve											
ELECTRICAL DATA											
Voltage / Phase (60 Hz)	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1
Fan/Compressor Inverter Drive Input	8.1	13.3	17.6	17.6	25.4	25.4	30	8.1	13.3	17.6	17.6
Minimum Circuit Ampacity ²	12.8	16.8	22.4	22.4	31.8	31.8	37.5	12.8	16.8	22.4	22.4
Max. Overcurrent Protection ³	15	20	25	25	35	35	40	15	20	25	25
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2”	1/2”	1/2”	1/2”	1/2” or 3/4”	1/2” or 3/4”	1/2” or 3/4”	1/2”	1/2”	1/2”	1/2”
EQUIPMENT WEIGHT (LBS)	119	119	129	133	163	163	174	119	119	129	133
SHIP WEIGHT (LBS)	133	133	143	148	183	183	196	133	133	143	148

¹ Tested and rated in accordance with ANSI/AHRI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 7/8” to 1 1/8” adapters for suction line connections.

• Unit is charged with refrigerant for 15’ of 3/8” liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.

(See table below for allowable line set diameter)

Standard Features

- Variable-speed swing compressors
- Quiet digitally commutated fan motor
- High-density compressor sound blanket
- Compatible with Goodman connected thermostat and other Goodman communicating equipment
- Proprietary control algorithmic logic
- In communicating mode, only two low voltage wires to outdoor unit required
- Diagnostic indicator lights, seven-segment LED display, and fault code storage
- Proprietary Inside intelligence for diagnostics
- Quiet-mode- provides enhanced acoustical comfort, up to 3 different sound levels (as low as 45 dBA)
- Field-selectable boost mode increases compressor speed during unusually high loads
- Field-installed bi-flow filter drier
- Coil and ambient temperature sensors
- Suction pressure transducer
- Sweat connection service valves with easy access to gauge ports
- AHRI Certified; ETL Listed

Cabinet Features

- Heavy-gauge galvanized steel cabinet with grille-style sound control side design
- Custom Ivory white powder-paint finish
- High corrosion (ZAM®), unpainted steel bottom frame and legs
- 500-hour salt-spray tested
- Wire fan discharge grille
- Top and side maintenance access
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)

R32

10 YEAR
REPLACEMENT
LIMITED
WARRANTY*

10 YEAR
PARTS
LIMITED
WARRANTY*

ONE-TIME
COMPRESSOR
REPLACEMENT
IN YEARS 11-99
OFFERED BY ASURE†

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Unit Replacement Limited Warranty and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

† One-time Compressor Replacement coverage is available to the original homeowner for years 11-99 after the installation date through an ASURE Extend Service Plan. Complete details about the Extended Service Plan options available from your ASURE dealer.



GLXS5B (R-32) | AIR CONDITIONER

UP TO 16.5 SEER2 | 1½ TO 5 TONS | HIGH-EFFICIENCY

Model	Nominal Capacity (Tons)	Voltage-Phase	Dimensions			Service Valve		dBs	Ship Weight (lbs)
			W"	D"	H"	Liquid"	Suction"		
GLXS5BA1810A*	1.5	208/230-1	26	26	27	3/8"	3/4"	73	134
GLXS5BA2410A*	2	208/230-1	29	29	32	3/8"	3/4"	69	167
GLXS5BA3010A*	2.5	208/230-1	35½	35½	39½	3/8"	3/4"	73	214
GLXS5BA3610A*	3	208/230-1	35½	35½	39½	3/8"	7/8"	71	213
GLXS5BA4210A*	3.5	208/230-1	35½	35½	36½	3/8"	7/8"	74	272
GLXS5BA4810A*	4	208/230-1	35½	35½	36½	3/8"	7/8"	75	271
GLXS5BA6010A*	5	208/230-1	35½	35½	41⅝	3/8"	7/8"	76	309

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- High-Efficiency Scroll Compressor
- Factory-installed filter drier
- Fully charged for 15' of tubing length
- 5mm diameter copper tube/enhanced aluminum fin coil
- Factory-installed filter drier
- Sweat connection service valves with easy access to gauge ports
- Enclosed contactor
- High-pressure switch
- Ground lug connection
- Capacitors with extended life
- AHRI Certified
- ETL Listed

Cabinet Features

- Removable grille-style top design
- compliant with UL 60335-2-40
- Venturi for increased velocity of airflow
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Wire fan discharge grille
- Steel louver coil guard
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2024 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available).

**R32**
**10 PARTS
YEAR LIMITED
WARRANTY***

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.

GLXS4M (R-32) | AIR CONDITIONER

15.2 SEER2 | 1½ TO 3 TONS | ENERGY-EFFICIENT

Model	Nominal Capacity (Tons)	Voltage-Phase	Dimensions			Service Valve		dBs	Ship Weight (lbs)
			W"	D"	H"	Liquid"	Suction"		
GLXS4MA1810A*	1.5	208/230-1	26	26	27	3/8"	3/4"	73	144
GLXS4MA2410A*	2	208/230-1	26	26	32½	3/8"	3/4"	69	151
GLXS4MA3010A*	2.5	208/230-1	29	29	35¾	3/8"	7/8"	70	167
GLXS4MA3610A*	3	208/230-1	29	29	39½	3/8"	7/8"	67	173

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations. This product may not be installed in the Southeast (including Hawaii) or Southwest Regions as of Jan. 1, 2015 (see pp. 6-7 for details).

Standard Features

- High-Efficiency Scroll Compressor
- Factory-installed filter drier
- Fully charged for 15' of tubing length
- 5mm diameter copper tube/enhanced aluminum fin coil
- Service valves with sweat connections and easy-to-access gauge ports
- Enclosed contactor
- Ground lug connection
- Capacitors with extended life
- High-pressure switch
- AHRI Certified
- ETL Listed

Cabinet Features

- Removable grille style top style grill design compatible with UL 60335-2-40
- Heavy-gauge galvanized-steel cabinet
- Venturi for increased velocity of airflow
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Steel louver coil guard
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2024 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



R32

10 YEARS **PARTS LIMITED WARRANTY***

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.

GLXS4B (R-32) | AIR CONDITIONER

15.2 SEER2 | 1½ TO 5 TONS | ENERGY-EFFICIENT

SPLIT SYSTEM
AIR CONDITIONERS

Model	Nominal Capacity (Tons)	Voltage-Phase	Dimensions			Service Valve		dBs	Ship Weight (lbs)
			W"	D"	H"	Liquid"	Suction"		
GLXS4BA1810A*	1.5	208/230-1	26	26	27	3/8"	3/4"	74	132
GLXS4BA2410A*	2	208/230-1	26	26	27	3/8"	3/4"	74	132
GLXS4BA3010A*	2.5	208/230-1	29	29	32	3/8"	3/4"	71	170
GLXS4BA3610A*	3	208/230-1	29	29	39½	3/8"	7/8"	67	173
GLXS4BA4210A*	3.5	208/230-1	35½	35½	35¾	3/8"	7/8"	72	225
GLXS4BA4810A*	4	208/230-1	35½	35½	35¾	3/8"	7/8"	73	226
GLXS4BA6010A*	5	208/230-1	35½	35½	39½	3/8"	7/8"	76	239

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Energy-efficient compressor
- Fully charged for 15' of tubing length
- Copper tube/ enhanced aluminum fin coil-5mm diameter
- Factory-installed filter drier
- Sweat connection service valves with easy access to gauge ports
- Enclosed contactor
- High-pressure switch
- Ground lug connection
- Capacitors with extended life
- AHRI Certified
- ETL Listed

Cabinet Features

- Removable grille-style top design compliant with UL 60335-2-40
- Venturi for increased velocity of airflow
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Wire fan discharge grille
- Steel louver coil guard
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2024 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



R32

10 YEAR PARTS LIMITED WARRANTY*

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.

GLXS3B (R-32) | AIR CONDITIONER

UP TO 15 SEER2 | 1½ TO 5 TONS | ENERGY-EFFICIENT

Model	Nominal Capacity (Tons)	Voltage-Phase	Dimensions			Service Valve		dBs	Ship Weight (lbs)
			W"	D"	H"	Liquid"	Suction"		
GLXS3BN1810A*	1.5	208/230-1	26	26	27½	¾"	¾"	73	129
GLXS3BN2410A*	2	208/230-1	26	26	27½	¾"	¾"	74	129
GLXS3BN3010A*	2.5	208/230-1	26	26	32½	¾"	¾"	74	149
GLXS3BN3610A*	3	208/230-1	26	26	32½	¾"	7/8"	69	151
GLXS3BN4210A*	3.5	208/230-1	29	29	35¾	¾"	7/8"	73	195
GLXS3BN4810A*	4	208/230-1	29	29	39½	¾"	7/8"	71	203
GLXS3BN6010A*	5	208/230-1	35½	35½	39½	¾"	7/8"	74	244

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations. This product may not be installed in the Southeast (including Hawaii) or Southwest Regions as of Jan. 1, 2015 (see pp. 6-7 for details).

Standard Features

- Energy-efficient compressor
- Fully charged for 15' of tubing length
- Copper tube/ enhanced aluminum fin coil-5mm diameter
- Factory-installed filter drier
- Sweat connection service valves with easy access to gauge ports
- Enclosed contactor
- High-pressure switch
- Ground lug connection
- Capacitors with extended life
- AHRI Certified
- ETL Listed

Cabinet Features

- Removable grille-style top design compliant with UL 60335-2-40
- Venturi for increased velocity of airflow
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Wire fan discharge grille
- Steel louver coil guard
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2024 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



R32

10 YEAR PARTS LIMITED WARRANTY

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.

GZV9S (R-32) | SPLIT SYSTEM HEAT PUMP

UP TO 21.0 SEER2 & 10.0 HSPF2 | HIGH-EFFICIENCY INVERTER

SPLIT SYSTEM
HEAT PUMPS

	GZV9SA 241CA*	GZV9SA 361CA*	GZV9S A4810A*	GZV9S A6010A*
CAPACITIES (AHRI RATED)				
Max. Cooling (BTU/h)-95F	24,000	34,200	46,000	54,000
Max. Heating (BTU/h)-47F	24,000	34,200	48,000	54,000
Max. Heating (BTU/h)-5F	24,000	34,200	44,000	47,000
AMBIENT OPERATION RANGE				
COOLING (°FDB(°CDB))	0 to 115 (-17.8 to 46.1)			
HEATING (°FDB(°CDB))	-10 to 70 (-23.3 to 21.1)			
COMPRESSOR Type	Swing	Swing	Swing	Swing
CONDENSER FAN MOTOR Horsepower	2 x 0.32	2 x 0.32	2 x 0.32	2 x 0.32
REFRIGERATION SYSTEM				
Refrigerant Line Size ¹				
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	7/8"	7/8"	1 1/8"	1 1/8"
Refrigerant Connection Size				
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	7/8"	7/8"	7/8"	7/8"
Valve Connection Type	Front and Back	Front and Back	Front and Back	Front and Back
Refrigerant Charge (oz.)	Sealing	Sealing	Sealing	Sealing
Expansion Device	162	162	162	162
Superheat at Service Valve	EEV	EEV	EEV	EEV
Subcooling at Service Valve	Auto-control	Auto-control	Auto-control	Auto-control
	11±1°F	11±1°F	11±1°F	11±1°F
ELECTRICAL DATA				
Voltage / Phase (60 Hz)	208-230/1	208-230/1	208-230/1	208-230/1
Fan/Compressor Inverter Drive	8.0	12.0	24.5	24.5
Input				
Minimum Circuit Ampacity ²	17.4	21.8	34.4	34.4
Max. Overcurrent Protection ³	20	25	40	40
Min / Max Volts	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
EQUIPMENT WEIGHT (LBS)	230	230	230	230
SHIP WEIGHT (LBS)	265	265	265	265
ENERGY STAR® CERTIFIED				

¹ Tested and rated in accordance with ANSI/AHRI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure. (See table below for allowable line set diameter)
- Quiet-mode - provides enhanced acoustical comfort, up to 3 different sound levels (as low as 45dBA)

† Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet **ENERGY STAR** criteria. Ask your contractor for details or visit www.energystar.gov. The www.energystar.gov website provides up-to-date system combinations certified to meet **ENERGY STAR** requirements.

10 YEAR
UNIT REPLACEMENT
LIMITED WARRANTY

10 YEAR
PARTS LIMITED
WARRANTY

ONE-TIME
COMPRESSOR REPLACEMENT
COVERAGE OFFERED BY ASURE

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Unit Replacement Limited Warranty and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

† One-time Compressor Replacement coverage is available to the original homeowner for years 11-99 after the installation date through an **ASURE** Extend Service Plan. Complete details about the Extended Service Plan options available from your **ASURE** dealer.

Standard Features

- Variable-speed swing compressors
- Strong heating capacity
- Quiet digitally commutated fan motor
- High-density compressor sound blanket
- Compatible with Goodman GTST connected thermostat and other Goodman communicating equipment
- Proprietary control algorithmic logic
- In communicating mode, only two lowvoltage wires to outdoor unit required
- Diagnostic indicator lights, seven-segment LED display, and fault code storage
- Proprietary Inside intelligence for diagnostics
- Quiet-mode - provides enhanced acoustical comfort, up to 3 different sound levels (as low as 45dBA)
- Field-selectable boost mode increases compressor speed during unusually high loads
- Field-installed bi-flow filter drier
- Coil and ambient temperature sensors
- Suction pressure transducer
- Sweat connection service valves with easy access to gauge ports
- Advanced water-shedding drain pan
- 3-Stage Heater Kit Available as a Field Installed Option
- Hot gas base pan eliminates extra drain pan heater down to 5°F
- Hot start technology
- AHRI Certified; ETL Listed

Cabinet Features

- Heavy-gauge galvanized steel cabinet with grille-style sound control side design
- Custom Ivory white powder-paint finish
- High corrosion (ZAM®), unpainted steel bottom frame and legs
- 500-hour salt-spray tested
- Wire fan discharge grille
- Top and side maintenance access
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



R32

Products that are recognized as the Most Efficient of Energy Star in 2025 prevent greenhouse gas emissions by meeting rigorous energy efficiency performance levels set by the U.S. Environmental Protection Agency. EPA has not changed the requirement for Energy Star Most Efficient for 2026 and hence they do not have a mark of Most Efficient 2026. However, products noted as Most Efficient 2025 comply with EPA requirements in 2026.

GZV7S (R-32) | SPLIT SYSTEM HEAT PUMP

UP TO 19.0 SEER2 & 8.8 HSPF2 | HIGH-EFFICIENCY INVERTER

	GZV7S A2410A*	GZV7S A3610A*	GZV7S A4210A*	GZV7S A4810A*	GZV7S 6010A*
CAPACITIES (AHRI RATED)					
Max. Cooling [BTU/h]-95F	23,200	35,000	41,000	46,500	52,000
Max. Heating [BTU/h]-47F	23,200	35,000	41,000	47,500	54,000
Max. Heating [BTU/h]-5F	17,000	29,000	31,000	33,600	46,000
AMBIENT OPERATION RANGE					
COOLING (°FDB(°CDB))	0 to 115 [-17.8 to 46.1]				
HEATING (°FDB(°CDB))	-10 to 70 [-23.3 to 21.1]				
COMPRESSOR					
Type	Swing	Swing	Swing	Swing	Swing
CONDENSER FAN MOTOR					
Horsepower	0.20	0.36	0.36	0.36	2 x 0.32
REFRIGERATION SYSTEM					
Refrigerant Line Size¹					
Liquid Line Size ("O.D.)	¾"	¾"	¾"	¾"	¾"
Suction Line Size ("O.D.)	⅞"	1⅛"	1⅛"	1⅛"	1⅛"
Refrigerant Connection Size					
Liquid Valve Size ("O.D.)	¾"	¾"	¾"	¾"	¾"
Suction Valve Size ("O.D.)	⅞"	⅞"	⅞"	⅞"	⅞"
Valve Connection Type	Front Sealing	Front and Back Sealing	Front and Back Sealing	Front and Back Sealing	Front and Back Sealing
Refrigerant Charge (oz.)	76	100	118	118	162
Expansion Device	EEV	EEV	EEV	EEV	EEV
Superheat at Service Valve	Auto-control	Auto-control	Auto-control	Auto-control	Auto-control
Subcooling at Service Valve	14±1°F	9±1°F	9±1°F	9±1°F	11±1°F
ELECTRICAL DATA					
Voltage / Phase (60 Hz)	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1
Fan/Compressor Inverter Drive					
Input	17.6	25.4	30	30	24.5
Minimum Circuit Ampacity²	22.4	31.8	37.5	37.5	34.4
Max. Overcurrent Protection³	25	35	40	40	40
Min / Max Volts	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	½"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"
EQUIPMENT WEIGHT (LBS)	132	168	179	179	236
SHIP WEIGHT (LBS)	147	185	198	198	271
ENERGY STAR® CERTIFIED	 COLD CLIMATE Most Efficient 2025	 COLD CLIMATE Most Efficient 2025	 COLD CLIMATE Most Efficient 2025	 COLD CLIMATE Most Efficient 2025	 COLD CLIMATE Most Efficient 2025

¹ Tested and rated in accordance with ANSI/AHRI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 3/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
(See table below for allowable line set diameter)
- Quiet-mode - provides enhanced acoustical comfort, up to 3 different sound levels (as low as 45dBA)

[†] Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet **ENERGY STAR** criteria. Ask your contractor for details or visit www.energystar.gov. The www.energystar.gov website provides up-to-date system combinations certified to meet **ENERGY STAR** requirements.

10 YEAR
REPLACEMENT
LIMITED
WARRANTY

10 PARTS
LIMITED
WARRANTY

ONE-TIME
COMPRESSOR
REPLACEMENT
IN YEARS 11-99
OFFERED BY ASURE

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Unit Replacement Limited Warranty and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

[†] One-time Compressor Replacement coverage is available to the original homeowner for years 11-99 after the installation date through an **ASURE** Extend Service Plan. Complete details about the Extended Service Plan options available from your **ASURE** dealer.

Products that are recognized as the Most Efficient of Energy Star in 2025 prevent greenhouse gas emissions by meeting rigorous energy efficiency performance levels set by the U.S. Environmental Protection Agency. EPA has not changed the requirement for Energy Star Most Efficient for 2026 and hence they do not have a mark of Most Efficient 2026. However, products noted as Most Efficient 2025 comply with EPA requirements in 2026.



Standard Features

- Variable-speed swing compressors
- Strong heating capacity
- Quiet digitally commutated fan motor
- High-density compressor sound blanket
- Compatible with Goodman GTST connected thermostat and other Goodman communicating equipment
- Proprietary control algorithmic logic
- In communicating mode, only two lowvoltage wires to outdoor unit required
- Diagnostic indicator lights, seven-segment LED display, and fault code storage
- Proprietary Inside intelligence for diagnostics
- Quiet-mode - provides enhanced acoustical comfort, up to 3 different sound levels (as low as 45dBA)
- Field-selectable boost mode increases compressor speed during unusually high loads
- Field-installed bi-flow filter drier
- Coil and ambient temperature sensors
- Suction pressure transducer
- Sweat connection service valves with easy access to gauge ports
- AHRI Certified; ETL Listed

Cabinet Features

- Heavy-gauge galvanized steel cabinet with grille-style sound control side design
- Custom Ivory white powder-paint finish
- High corrosion (ZAM®), unpainted steel bottom frame and legs
- 500-hour salt-spray tested
- Wire fan discharge grille
- Top and side maintenance access
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



GZV6S (R-32) | SPLIT SYSTEM HEAT PUMP

UP TO 19.0 SEER2 & 8.8 HSPF2 | HIGH-EFFICIENCY INVERTER

SPLIT SYSTEM
HEAT PUMPS

	GZV6S A1810A*	GZV6S A2410A*	GZV6S A3010A*	GZV6S A3610A*	GZV6S A4210A*	GZV6S A4810A*	GZV6S A6010A*
CAPACITIES (AHRI RATED)							
Max. Cooling (BTU/h)-95F	17,100	23,200	28,400	34,200	41,000	45,500	53,500
Max. Heating (BTU/h)-47F	17,400	23,200	28,800	34,600	40,000	45,500	54,500
Max. Heating (BTU/h)-5F	13,000	14,200	17,000	20,000	27,400	28,000	33,000
AMBIENT OPERATION RANGE							
COOLING (°FDB(°CDB))	0 to 115 (-17.8 to 46.1)						
HEATING (°FDB(°CDB))	-10 to 70 (-23.3 to 21.1)						
COMPRESSOR							
Type	Swing	Swing	Swing	Swing	Swing	Swing	Swing
CONDENSER FAN MOTOR							
Horsepower	0.09	0.09	0.20	0.20	0.36	0.36	0.36
REFRIGERATION SYSTEM							
Refrigerant Line Size ¹							
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	7/8"	7/8"	1 1/8"	1 1/8"	1 1/8"
Refrigerant Connection Size							
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	3/4"	3/4"	7/8"	7/8"	7/8"	7/8"	7/8"
Valve Connection Type	Front Sealing	Front Sealing	Front Sealing	Front Sealing	Front and Back Sealing	Front and Back Sealing	Front and Back Sealing
Refrigerant Charge (oz.)	74	74	76	83	100	100	118
Expansion Device	EEV	EEV	EEV	EEV	EEV	EEV	EEV
Superheat at Service Valve	Auto-control	Auto-control	Auto-control	Auto-control	Auto-control	Auto-control	Auto-control
Subcooling at Service Valve	10±1°F	12±1°F	14±1°F	15±1°F	8±1°F	9±1°F	9±1°F
ELECTRICAL DATA							
Voltage / Phase (60 Hz)	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1	208-230/1
Fan/Compressor Inverter Drive Input	8.1	13.3	17.6	17.6	25.4	25.4	30
Minimum Circuit Ampacity ²	12.8	16.8	22.4	22.4	31.8	31.8	37.5
Max. Overcurrent Protection ³	15	20	25	25	35	35	40
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2"	1/2"	1/2"	1/2"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
EQUIPMENT WEIGHT (LBS)	122	122	132	137	168	168	179
SHIP WEIGHT (LBS)	137	137	147	151	185	185	198
ENERGY STAR® CERTIFIED							

Standard Features

- Variable-speed swing compressors
- Quiet digitally commutated fan motor
- High-density compressor sound blanket
- Compatible with Goodman GTST connected thermostat and other Goodman communicating equipment
- Proprietary control algorithmic logic
- In communicating mode, only two lowvoltage wires to outdoor unit required
- Diagnostic indicator lights, seven-segment LED display, and fault code storage
- Proprietary Inside intelligence for diagnostics
- Quiet-mode - provides enhanced acoustical comfort, up to 3 different sound levels (as low as 45dBA)
- Field-selectable boost mode increases compressor speed during unusually high loads
- Field-installed bi-flow filter drier
- Coil and ambient temperature sensors
- Suction pressure transducer
- Sweat connection service valves with easy access to gauge ports
- AHRI Certified; ETL Listed

Cabinet Features

- Heavy-gauge galvanized steel cabinet with grille-style sound control side design
- Custom Ivory white powder-paint finish
- High corrosion (ZAM®), unpainted steel bottom frame and legs
- 500-hour salt-spray tested
- Wire fan discharge grille
- Top and side maintenance access
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)

¹ Tested and rated in accordance with ANSI/AHRI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Notes

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure. (See table below for allowable line set diameter)
- Quiet-mode - provides enhanced acoustical comfort, up to 3 different sound levels (as low as 45dBA)

† Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet **ENERGY STAR** criteria. Ask your contractor for details or visit www.energystar.gov. The www.energystar.gov website provides up-to-date system combinations certified to meet **ENERGY STAR** requirements.

*Energy Star Most Efficient 2025 for the 1.5 ton models only

Products that are recognized as the Most Efficient of Energy Star in 2025 prevent greenhouse gas emissions by meeting rigorous energy efficiency performance levels set by the U.S. Environmental Protection Agency. EPA has not changed the requirement for Energy Star Most Efficient for 2026 and hence they do not have a mark of Most Efficient 2026. However, products noted as Most Efficient 2025 comply with EPA requirements in 2026.



R32

10 YEAR
REPLACEMENT
LIMITED
WARRANTY*

10 YEAR
PARTS
LIMITED
WARRANTY*

ONE-TIME
COMPRESSOR
REPLACEMENT
WARRANTY*
(OFFERED BY ASURE)

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Unit Replacement Limited Warranty and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

† One-time Compressor Replacement coverage is available to the original homeowner for years 11-99 after the installation date through an **ASURE** Extend Service Plan. Complete details about the Extended Service Plan options available from your **ASURE** dealer.

GLZT7C (R-32) | HEAT PUMP

UP TO 17.5 SEER2 & UP TO 8.2 HSPF2 | HIGH-EFFICIENCY

Model	Nominal Capacity (Tons)		Voltage-Phase	Dimensions			Service Valve		dBs	Ship Weight (lbs)
	Cooling	Heating ¹		W"	D"	H"	Liquid"	Suction"		
GLZT7CA2410A*	2	2	208/230-1	35½	35½	39 1/2	¾"	¾"	72	235
GLZT7CA3610A*	3	3	208/230-1	35½	35½	35 3/4	¾"	7/8"	71	277
GLZT7CA4810A*	4	4	208/230-1	35½	35½	41 5/8	¾"	1½"	75	323
GLZT7CA6010A*	5	5	208/230-1	35½	35½	41 5/8	¾"	1½"	75	321

¹Tons of Refrigeration

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Two-Stage Copeland® UltraTech scroll compressor
- High-density foam compressor sound blanket
- Integrated communicating ComfortBridge™ technology
- Commissioning and diagnostics via indoor board Bluetooth with the CoolCloud™ phone and tablet application
- Goodman® GTST Connected Thermostat Compatibility
- ComfortAlert™ built in diagnostics
- Copper tube/enhanced aluminum fin coil - 5mm on 2.0-3.0T
- Copper tube/enhanced aluminum fin coil - 7mm on 4.0-5.0 T
- Efficient, two-speed ECM condenser fan motor
- Simple low-voltage wiring to outdoor unit in communicating mode
- Diagnostic indicator lights and storage of six fault codes
- Color-coded terminal strip for non-communicating set-up
- High- and low-pressure switches
- Time-delay technology with short-cycle protection to ensure quiet, reliable defrost
- Factory-installed bi-flow liquid-line filter drier
- Factory-installed suction-line accumulator
- Factory-installed compressor crankcase heater
- Factory-installed high-capacity muffler
- Factory-installed coil and ambient temperature sensors
- AHRI Certified; ETL Listed

Features

- Grille-style sound control top design
- Custom Nickel Gray powder-paint finish
- 500-hour salt-spray tested
- Wire fan discharge grille
- Steel louver coil guard
- Single panel access to controls with space provided for field-installed accessories
- Sweat connection service valves with easy access to gauge ports
- When properly anchored, meets the 2024 Florida
- Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



R32

10 YEAR
UNIT REPLACEMENT
LIMITED WARRANTY*

10 YEAR
PARTS LIMITED
WARRANTY*

ONE-TIME
COMPRESSOR
REPLACEMENT
IN YEARS 11-99
OFFERED BY ASURE†

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Unit Replacement Limited Warranty and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

† One-time Compressor Replacement coverage is available to the original homeowner for years 11-99 after the installation date through an ASURE Extend Service Plan. Complete details about the Extended Service Plan options available from your ASURE dealer.

GLZS5B (R-32) | HEAT PUMP

UP TO 16 SEER2 & UP TO 8.2 HSPF2 | HIGH-EFFICIENCY

SPLIT SYSTEM
HEAT PUMPS

Model	Nominal Capacity (Tons)		Voltage-Phase	Dimensions			Service Valve		dBs	Ship Weight (lbs)
	Cooling	Heating ¹		W"	D"	H"	Liquid"	Suction"		
GLZS5BA1810A*	1½	1½	208/230-1	29	29	39½	3/8"	3/4"	70.0	186
GLZS5BA2410A*	2	2	208/230-1	29	29	39½	3/8"	3/4"	73.0	213
GLZS5BA3010A*	2½	2½	208/230-1	35½	35½	39½	3/8"	3/4"	73.0	235
GLZS5BA3610A*	3	3	208/230-1	35½	35½	39½	3/8"	3/4"	71.1	242
GLZS5BA4210A*	3½	3½	208/230-1	35½	35½	35¾	3/8"	7/8"	72.0	277
GLZS5BA4810A*	4	4	208/230-1	35½	35½	36½	3/8"	7/8"	73.6	284
GLZS5BA6010A*	5	5	208/230-1	35½	35½	41⅝	3/8"	7/8"	74.8	329

¹Tons of Refrigeration

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- High-efficiency scroll compressor
- SmartShift® technology to ensure quiet reliable defrost
- Enhanced aluminum fin with coil-5mm diameter copper tubes in 1.5T-3.5 ton
- Enhanced aluminum fin coil with 7mm diameter copper tubes 4.0-5.0 ton
- Single-speed PSC condenser fan motor
- Factory-installed suction-line accumulator
- Factory-installed compressor crankcase heater
- Factory-installed high-capacity muffler
- High- and low-pressure switches
- Service valves with sweat connections and easy access to gauge ports
- Fully charged for 15' of tubing length
- Ground lug connection
- Fully enclosed contactor
- Capacitor with extended life
- AHRI Certified; ETL Listed

Cabinet Features

- Removable grille style top design compliant with UL 60335-2-40
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Top and side maintenance access
- Single panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2024 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



R32

**10 PARTS
YEAR LIMITED
WARRANTY***

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply. refer to complete warranty details for full list of limitations and exclusions.

GLZS4M (R-32) | HEAT PUMP

UP TO 15.2 SEER2 & UP TO 7.8 HSPF2 | 1½ TO 3 TONS | ENERGY-EFFICIENT

Model	Nominal Capacity (Tons)		Voltage-Phase	Dimensions			Service Valve		dBs	Ship Weight (lbs)
	Cooling	Heating ¹		W"	D"	H"	Liquid"	Suction"		
GLZS4MA1810A*	1½	1½	208/230-1	29	29	32 8/16	¾"	¾"	69	175
GLZS4MA2410A*	2	2	208/230-1	29	29	32 8/16	¾"	¾"	69	175
GLZS4MA3010A*	2½	2½	208/230-1	29	29	39 8/16	¾"	¾"	71	189
GLZS4MA3610A*	3	3	208/230-1	35½	35½	35 11/16	¾"	7/8"	74	228

¹Tons of Refrigeration

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- High-efficiency scroll compressor
- SmartShift® technology to ensure quiet reliable defrost
- Enhanced aluminum fin coil- 5 mm diameter on 1.5T-3.5 Ton
- Enhanced aluminum fin coil with 7mm diameter copper tubes in 4.0- to 5.0-ton
- Single-speed PSC condenser fan motor
- Factory-installed bi-flow liquid-line filter drier
- Factory-installed suction line accumulator
- Factory-installed compressor crankcase heater
- Factory-installed high capacity muffler
- High- and low-pressure switches
- Service valves with sweat connections and easy access to gauge ports
- Fully charged for 15' of tubing length
- Contactor with lug connection
- Ground lug connection
- Capacitors with extended life
- AHRI Certified; ETL Listed

Cabinet Features

- Removable grille style top design compliant with UL 60335-2-40
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Top and side maintenance access
- When properly anchored, meets the 2024 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



R32

**10 PARTS
YEAR LIMITED
WARRANTY***

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply. refer to complete warranty details for full list of limitations and exclusions.

GLZS4B (R-32) | HEAT PUMP

UP TO 15.2 SEER2 & UP TO 7.8 HSPF2 | ENERGY-EFFICIENT

SPLIT SYSTEM
HEAT PUMPS

Model	Nominal Capacity (Tons)		Voltage-Phase	Dimensions			Service Valve		dBs	Ship Weight (lbs)
	Cooling	Heating ¹		W"	D"	H"	Liquid"	Suction"		
GLZS4BA1810A*	1½	1½	208/230-1	29	29	32½	¾"	¾"	74	165
GLZS4BA2410A*	2	2	208/230-1	29	29	32½	¾"	¾"	74	165
GLZS4BA3010A*	2½	2½	208/230-1	29	29	39½	¾"	¾"	77	190
GLZS4BA3610A*	3	3	208/230-1	35½	35½	35¾	¾"	7/8"	75	211
GLZS4BA4210A*	3½	3½	208/230-1	35½	35½	35¾	¾"	1⅛"	72	277
GLZS4BA4810A*	4	4	208/230-1	35½	35½	36½	¾"	1⅛"	74	284
GLZS4BA6010A*	5	5	208/230-1	35½	35½	41¾	¾"	1⅛"	75	320

¹Tons of Refrigeration

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Energy-efficient compressor
- SmartShift® technology to ensure quiet reliable defrost
- Enhanced aluminum fin coil with 5 mm diameter copper tubes in 1.5- to 3.5-ton
- Single-speed PSC condenser fan motor
- Factory-installed bi-flow liquid-line filter drier
- Factory-installed suction-line accumulator
- Factory-installed compressor crankcase heater
- Factory-installed high-capacity muffler
- High- and low-pressure switches
- Service valves with sweat connections and easy access to gauge ports
- Fully charged for 15' of tubing length
- Contactor with lug connection
- Ground lug connection
- AHRI Certified; ETL Listed

Cabinet Features

- Removable grille-style top design compliant with UL 60335-2-40
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Top and side maintenance access
- When properly anchored, meets the 2024 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



R32

10 YEAR PARTS LIMITED WARRANTY

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.



GAS FURNACES





GRVM97 (B) | MODULATING GAS FURNACE

UP TO 97% AFUE | MODULATING, VARIABLE-SPEED ECM

GAS
FURNACES

Model	High-Fire Heating ¹		Low-Fire Heating ¹		AFUE %	Tons A/C ²	Dimensions			Ship Weight (lbs)	ENERGY STAR® Certified
	Input	Output	Input	Output			W"	D"	H"		
GRVM970603BN	60,000	58,200	30,000	29,100	97	3	17½	28⅞	34½	118	YES
GRVM970803BN	80,000	77,600	40,000	38,800	97	3	17½	28⅞	34½	121	YES
GRVM970804CN	80,000	77,600	40,000	38,800	97	4	21"	28⅞	34½	142	YES
GRVM971005CN	100,000	97,000	50,000	48,500	97	5	21"	28⅞	34½	144	YES
GRVM971205DN	120,000	116,400	60,000	58,200	97	5	24½	28⅞	34½	157	YES

¹ BTU/h ² Max tons @ 0.5" ESP

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Integrated communicating ComfortBridge™ Technology
- Commissioning and diagnostics via on board Bluetooth with the CoolCloud™ phone and tablet application
- Heavy-duty aluminized-steel tubular heat exchanger
- Stainless-steel secondary heat exchanger
- Self-calibrating modulating gas valve auto-configure for each installation
- Durable Silicon Nitride igniter
- Quiet variable-speed induced draft blower
- Self-diagnostic control board with constant memory fault code history output to a dual 7-segment display
- Color-coded low-voltage terminals with provisions for electronic air cleaner
- Efficient and quiet variable-speed airflow system gently ramps up or down according to heating or cooling demand
- Multiple continuous fan speed options offer quiet air circulation
- Auto-Comfort and enhanced dehumidification modes available
- All models comply with California 40 ng/J Low NO_x emissions standard
- Can no longer be installed in California's South Coast Air Quality Management District (SCAQMD) on or after October 1, 2019.
- AHRI Certified; ETL Listed

Cabinet Features

- Designed for multi-position installation: upflow, horizontal left or right
- Certified for direct vent (2-pipe) or non-direct vent (1-pipe)
- Easy-to-install top venting with optional side venting
- Convenient left or right connection for gas and electrical service
- Cabinet air leakage ≤ 2%
- Heavy-gauge steel cabinet with durable finish
- Fully insulated heat exchanger and blower section
- Airtight solid bottom or side return with easy-cut tabs for effortless removal in bottom air-inlet applications



R32

10 YEAR UNIT REPLACEMENT LIMITED WARRANTY | **10 YEAR** PARTS LIMITED WARRANTY | **20 YEAR** HEAT EXCHANGER LIMITED WARRANTY + **ONE-TIME** HEAT EXCHANGER REPLACEMENT LIMITED WARRANTY (FOR YEARS 21-99)

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Unit Replacement Limited Warranty, 10-Year Parts Limited Warranty, and 99-Year Heat Exchanger Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

GDVM97 (B) | MODULATING GAS FURNACE

97% AFUE | MODULATING, VARIABLE-SPEED ECM



Model	High-Fire Heating ¹		Low-Fire Heating ¹		AFUE %	Tons A/C ²	Dimensions			Ship Weight (lbs)	ENERGY STAR® Certified
	Input	Output	Input	Output			W"	D"	H"		
GDVM970603BN	60,000	58,200	30,000	29,100	97	3	17½	28⅞	34½	117	YES
GDVM970803BN	80,000	77,600	40,000	38,800	97	3	17½	28⅞	34½	122	YES
GDVM970804CN	80,000	77,600	40,000	38,800	97	4	21"	28⅞	34½	144	YES
GDVM971005CN	100,000	97,000	50,000	48,500	97	5	21"	28⅞	34½	146	YES

¹ BTU/h ² Max tons @ 0.5" ESP

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Integrated communicating ComfortBridge™ Technology
- Commissioning and diagnostics via on board Bluetooth with the CoolCloud™ phone and tablet application
- Heavy-duty aluminized-steel tubular heat exchanger
- Stainless-steel secondary heat exchanger
- Self-calibrating modulating gas valve auto-configure for each installation
- Durable Silicon Nitride igniter
- Quiet variable-speed induced draft blower
- Self-diagnostic control board with constant memory fault code history output to a dual 7-segment display
- Color-coded low-voltage terminals with provisions for electronic air cleaner
- Efficient and quiet variable-speed airflow system gently ramps up or down according to heating or cooling demand
- Multiple continuous fan speed options offer quiet air circulation
- Auto-Comfort and enhanced dehumidification modes available
- All models comply with California 40 ng/J Low NO_x emissions standard
- Can no longer be installed in California's South Coast Air Quality Management District (SCAQMD) on or after October 1, 2019.
- AHRI Certified; ETL Listed

Cabinet Features

- Designed for multi-position installation: upflow, horizontal left or right
- Certified for direct vent (2-pipe) or non-direct vent (1-pipe)
- Easy-to-install top venting with optional side venting
- Convenient left or right connection for gas and electrical service
- Cabinet air leakage ≤ 2%
- Heavy-gauge steel cabinet with durable finish
- Fully insulated heat exchanger and blower section
- Airtight solid bottom or side return with easy-cut tabs for effortless removal in bottom air-inlet applications



R32

10 YEAR UNIT REPLACEMENT LIMITED WARRANTY* | **10 YEAR** PARTS LIMITED WARRANTY* | **20 YEAR** HEAT EXCHANGER LIMITED WARRANTY* + **ONE-TIME** HEAT EXCHANGER REPLACEMENT LIMITED WARRANTY* (FOR YEARS 21-99)

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Unit Replacement Limited Warranty, 10-Year Parts Limited Warranty, and 99-Year Heat Exchanger Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply. refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.



GRVT96 (B) / GDVT96 (B) | TWO-STAGE GAS FURNACE

UP TO 97.5% AFUE | HIGH-EFFICIENCY, VARIABLE-SPEED ECM

Model	High-Fire Heating ¹		Low-Fire Heating ¹		AFUE %	Tons A/C ²	Dimensions			Ship Weight (lbs)	ENERGY STAR® Certified
	Input	Output	Input	Output			W"	D"	H"		
GRVT960403BN	40,000	39,000	28,000	27,300	97.50	3	17½	28⅞	34½	114	YES
GRVT960603BN	60,000	58,200	42,000	40,740	97.00	3	17½	28⅞	34½	117	YES
GRVT960803BN	80,000	76,880	56,000	53,816	96.10	3	17½	28⅞	34½	120	YES
GRVT960804CN	80,000	77,600	56,000	54,320	97.00	4	21"	28⅞	34½	141	YES
GRVT961005CN	100,000	96,100	70,000	67,270	96.10	5	21"	28⅞	34½	143	YES
GRVT961005DN	100,000	97,500	70,000	68,250	97.50	5	24½	28⅞	34½	153	YES
GRVT961205DN	120,000	115,320	84,000	80,724	96.10	5	24½	28⅞	34½	156	YES
GDVT960403BN	40,000	38,800	28,000	27,160	97.00	3	17½	28⅞	34½	116	YES
GDVT960603BN	60,000	58,200	42,000	40,740	97.00	3	17½	28⅞	34½	119	YES
GDVT960804CN	80,000	76,880	56,000	53,816	96.10	4	21"	28⅞	34½	143	YES
GDVT961005CN	100,000	96,100	70,000	67,270	96.10	5	21"	28⅞	34½	145	YES
GDVT961205DN	120,000	115,320	84,000	80,724	96.10	5	24½	28⅞	34½	158	YES

¹ BTU/h ² Max tons @ 0.5" ESP

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Integrated communicating ComfortBridge™ Technology
- Commissioning and diagnostics via on board Bluetooth with the CoolCloud™ phone and tablet application
- Heavy-duty aluminized-steel tubular heat exchanger
- Stainless-steel secondary heat exchanger
- Two-stage gas valve provides quiet, economical heating
- Durable Silicon Nitride igniter
- Quiet two-speed induced draft blower
- Compatible with any single-stage thermostat
- Self-diagnostic control board with constant memory fault code history output to a triple 7-segment display
- Color-coded low-voltage terminals with provisions for electronic air cleaner
- Efficient and quiet variable-speed airflow system gently ramps up or down according to heating or cooling demand
- Multiple continuous fan speed options offer quiet air circulation
- Auto-Comfort and enhanced dehumidification modes available
- All models comply with California 20 ng/J Low NOx emissions standard

- Can no longer be installed in California's South Coast Air Quality Management District (SQAQMD) on or after October 1, 2019.
- AHRI Certified; ETL Listed

Cabinet Features

- Designed for multi-position installation: GMVC96: upflow, horizontal left or right
GCVC96: downflow, horizontal left or right
- Certified for direct vent (2-pipe) or non-direct vent (1-pipe)
- Easy to install top venting with optional side venting
- Convenient left or right connection for gas and electrical service
- Cabinet air leakage (QLeak) ≤ 2%
- Heavy-gauge steel cabinet with durable baked-enamel finish
- Fully insulated heat exchanger and blower section
- Airtight solid bottom or side-return with easy-cut tabs for effortless removal in bottom air-inlet applications



R32

10 YEAR UNIT REPLACEMENT LIMITED WARRANTY | **10 YEAR** PARTS LIMITED WARRANTY | **20 YEAR** HEAT EXCHANGER LIMITED WARRANTY + **ONE-TIME** HEAT EXCHANGER REPLACEMENT LIMITED WARRANTY (FOR YEARS 21-99)

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Unit Replacement Limited Warranty, 10-Year Parts Limited Warranty, and 99-Year Heat Exchanger Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

GRVS96-U | ULTRA LOW NOX | VARIABLE-SPEED GAS FURNACE

UP TO 96% AFUE | HIGH-EFFICIENCY, VARIABLE-SPEED ECM



Model	Heating Capacity ¹		AFUE %	Tons A/C ²	Dimensions			Ship Weight (lbs)
	Input	Output			W"	D"	H"	
GRVS960603BU	60,000	57,600	96	3	17½	28⅞	34½	122
GRVS960805CU	80,000	76,880	96	5	21"	28⅞	34½	147

¹ BTU/h ² Max tons @ 0.5" ESP

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Heavy-duty stainless-steel tubular heat exchanger
- Super-ferritic Stainless-steel secondary heat exchanger
- Single-stage gas valve
- Durable Silicon Nitride igniter
- Quiet modulating induced draft blower
- Self-diagnostic control board with constant memory fault code history output to a LED
- Eligible for installation in California's South Coast Air Quality Management District (SCAQMD) and San Joaquin Valley Air Pollution Control District (SJVUAPCD). This furnace complies with the 14 ng/J NOx emission limit in SCAQMD Rule 1111 and SJVUAPCD Rule 4905.
- AHRI Certified; ETL Listed

Cabinet Features

- Designed for multi-position installation — GRVS96-U: upflow, horizontal left or right
- Certified for direct vent (2-pipe or non-direct vent (1-pipe)
- Easy-to-install top venting with optional side venting — GRVS96-U: upflow models only
- Convenient left or right connection for gas and electrical service
- Cabinet air leakage (QLeak) ≤ 1.4%
- Heavy-gauge steel cabinet with durable finish
- Fully insulated heat exchanger and blower section
- Airtight solid bottom or side return with easy-cut tabs for effortless removal in bottom air-inlet applications



R32

10 YEAR UNIT REPLACEMENT LIMITED WARRANTY* | **10 YEAR** PARTS LIMITED WARRANTY* | **20 YEAR** HEAT EXCHANGER LIMITED WARRANTY* + **ONE-TIME** HEAT EXCHANGER REPLACEMENT LIMITED WARRANTY* (FOR YEARS 21-99)

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Unit Replacement Limited Warranty, 10-Year Parts Limited Warranty, and 99-Year Heat Exchanger Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply. refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

GR9S96-U | ULTRA LOW NOX | SINGLE-STAGE GAS FURNACE

UP TO 97% AFUE | MULTI-SPEED ECM

GAS
FURNACES

Model	Heating Capacity ¹		AFUE %	Tons A/C ²	Dimensions			Ship Weight (lbs)
	Input	Output			W"	D"	H"	
GR9S960403AN	40,000	38,800	97	3	14"	28 ⁷ / ₈	34 ¹ / ₂	108
GR9S960603BN	60,000	58,200	97	3	17 ¹ / ₂	28 ⁷ / ₈	34 ¹ / ₂	118
GR9S960803BN	80,000	76,800	96	3	17 ¹ / ₂	28 ⁷ / ₈	34 ¹ / ₂	118
GR9S960804CN	80,000	77,600	97	4	21"	28 ⁷ / ₈	34 ¹ / ₂	141
GR9S960805CN	80,000	77,600	97	5	21"	28 ⁷ / ₈	34 ¹ / ₂	142
GR9S961005CN	100,000	96,000	96	5	21"	28 ⁷ / ₈	34 ¹ / ₂	144
GR9S961205DN	120,000	115,200	96	5	24 ¹ / ₂	28 ⁷ / ₈	34 ¹ / ₂	156

¹ BTU/h ² Max tons @ 0.5" ESP

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Heavy-duty stainless-steel tubular heat exchanger
- Super-ferritic Stainless-steel secondary heat exchanger
- Single-stage gas valve
- Durable Silicon Nitride igniter
- Quiet multi-speed induced draft blower
- Self-diagnostic control board with constant memory fault code history output to a LED
- Eligible for installation in California's South Coast Air Quality Management District (SCAQMD) and San Joaquin Valley Air Pollution Control District (SJVUAPCD). This furnace complies with the 14 ng/J NOx emission limit in SCAQMD Rule 1111 and SJVUAPCD Rule 4905.
- AHRI Certified; ETL Listed

Cabinet Features

- Designed for multi-position installation —GR9S96: upflow, horizontal left or right
- Certified for direct vent (2-pipe) or non-direct vent (1-pipe)
- Easy-to-install top venting with optional side venting — GR9S96/ upflow models only
- Convenient left or right connection for gas and electrical service
- Cabinet air leakage (QLeak) ≤ 1.4%
- Heavy-gauge steel cabinet with durable finish
- Fully insulated heat exchanger and blower section
- Airtight solid bottom or side return with easy-cut tabs for effortless removal in bottom air-inlet applications



R32

10 YEAR UNIT REPLACEMENT LIMITED WARRANTY* | **10 YEAR** PARTS LIMITED WARRANTY* | **20 YEAR** HEAT EXCHANGER REPLACEMENT LIMITED WARRANTY* + **ONE-TIME** HEAT EXCHANGER REPLACEMENT LIMITED WARRANTY* (FOR YEARS 21-99)

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Unit Replacement Limited Warranty, 10-Year Parts Limited Warranty, and 99-Year Heat Exchanger Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

CDVS96-U | ULTRA LOW NOX | SINGLE-STAGE GAS FURNACE

UP TO 96% AFUE | VARIABLE-SPEED ECM

Model	Heating Capacity ¹		AFUE %	Tons A/C ²	Dimensions			Ship Weight (lbs)
	Input	Output			W"	D"	H"	
CDVS960603BU	60,000	57,600	96	3	17½	28⅞	34½	119
CDVS960805CU	80,000	76,880	96	5	21	28⅞	34½	145

¹ BTU/h ² Max tons @ 0.5" ESP

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Heavy-duty stainless-steel tubular heat exchanger
- Super-ferritic Stainless-steel secondary heat exchanger
- Single-stage gas valve
- Durable Silicon Nitride igniter
- Quiet variable-speed induced draft blower
- Self-diagnostic control board with constant memory fault code history output to a LED
- Eligible for installation in California's South Coast Air Quality Management District (SCAQMD) and San Joaquin Valley Air Pollution Control District (SJVUAPCD). This furnace complies with the 14 ng/J NOx emission limit in SCAQMD Rule 1111 and SJVUAPCD Rule 4905.
- AHRI Certified; ETL Listed

Cabinet Features

- Designed for multi-position installation —CDVS96-U: upflow, horizontal left or right
- Certified for direct vent (2-pipe) or non-direct vent (1-pipe)
- Easy-to-install top venting with optional side venting — GRVS96-U/ upflow models only
- Convenient left or right connection for gas and electrical service
- Cabinet air leakage (QLeak) ≤ 1.4%
- Heavy-gauge steel cabinet with durable finish
- Fully insulated heat exchanger and blower section
- Airtight solid bottom or side return with easy-cut tabs for effortless removal in bottom air-inlet applications



R32

10 YEAR UNIT REPLACEMENT LIMITED WARRANTY* | **10 YEAR** PARTS LIMITED WARRANTY* | **20 YEAR** HEAT EXCHANGER LIMITED WARRANTY* + **ONE-TIME** HEAT EXCHANGER REPLACEMENT LIMITED WARRANTY* (FOR YEARS 21-99)

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Unit Replacement Limited Warranty, 10-Year Parts Limited Warranty, and 99-Year Heat Exchanger Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply; refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

GR9T96 (R-32) | TWO-STAGE GAS FURNACE

UP TO 97% AFUE | TWO-STAGE, MULTI-SPEED ECM

GAS
FURNACES

Model	High-Fire Heating ¹		Low-Fire Heating ¹		AFUE %	Tons A/C ²	Dimensions			Ship Weight (lbs)
	Input	Output	Input	Output			W"	D"	H"	
GR9T960303ANA	30,000	28,800	21,000	20,160	97	3	14"	28 ⁷ / ₈	34 ¹ / ₂	106
GR9T960403ANA	40,000	38,400	28,000	26,880	97	3	14"	28 ⁷ / ₈	34 ¹ / ₂	106
GR9T960603ANA	60,000	57,600	42,000	40,320	96	3	14"	28 ⁷ / ₈	34 ¹ / ₂	110
GR9T960603BNA	60,000	57,600	42,000	40,320	97	3	17 ¹ / ₂	28 ⁷ / ₈	34 ¹ / ₂	115
GR9T960803BNA	80,000	76,800	56,000	53,760	96	3	17 ¹ / ₂	28 ⁷ / ₈	34 ¹ / ₂	118
GR9T960804CNA	80,000	76,800	100,000	53,760	97	4	21"	28 ⁷ / ₈	34 ¹ / ₂	123
GR9T961004CNA	100,000	96,000	70,000	67,200	97	4	21"	28 ⁷ / ₈	34 ¹ / ₂	140
GR9T961005CNA	100,000	96,000	70,000	67,200	97	5	21"	28 ⁷ / ₈	34 ¹ / ₂	140
GR9T961205DNA	120,000	115,200	84,000	80,640	96	5	24 ¹ / ₂	28 ⁷ / ₈	34 ¹ / ₂	154

¹ BTU/h ² Max tons @ 0.5" ESP

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Energy-efficient, multi-speed ECM blower motor
- Heavy-duty, aluminized-steel tubular heat exchanger
- Stainless-steel secondary heat exchanger
- Two-stage gas valve provides quiet, economical heating
- Durable Silicon Nitride igniter
- Quiet two-speed induced draft blower
- Self-diagnostic control board with constant memory fault code history output to a LED
- Color-coded low-voltage terminals with provisions for electronic air cleaner and humidifier
- Low continuous fan speed options offer quiet air circulation
- All models comply with California 40 ng/J Low NOx emissions standard
- Can not be installed in California's South Coast AirQuality Management District (SCAQMD) and San Joaquin Valley Air Pollution Control District (SJVAPCD).
- AHRI Certified; ETL Listed

Cabinet Features

- Designed for multi-position installation — GR9T96: upflow, horizontal left or right GD9T96: downflow, horizontal left or right
- Certified for direct vent (2-pipe) or non-direct vent (1-pipe)
- Easy-to-install top venting with optional side venting — GR9T96/upflow models only
- Convenient left or right connection for gas and electrical service
- Cabinet air leakage (QLeak) ≤ 2%
- Heavy-gauge steel cabinet with durable finish
- Fully insulated heat exchanger and blower section
- Airtight solid bottom or side return with easy-cut tabs for effortless removal in bottom air-inlet applications



R32

10 YEAR UNIT REPLACEMENT LIMITED WARRANTY | **10 YEAR** PARTS LIMITED WARRANTY | **20 YEAR** HEAT EXCHANGER LIMITED WARRANTY + **ONE-TIME** HEAT EXCHANGER REPLACEMENT LIMITED WARRANTY (FOR YEARS 21-99)

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Unit Replacement Limited Warranty, 10-Year Parts Limited Warranty, and 99-Year Heat Exchanger Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

GD9T96 (R-32) | TWO-STAGE GAS FURNACE

UP TO 97% AFUE | TWO-STAGE, MULTI-SPEED ECM

Model	High-Fire Rate ¹		Low-Fire Rate ¹		AFUE %	Tons A/C ²	Dimensions			Ship Weight (lbs)
	Input	Output	Input	Output			W"	D"	H"	
GD9T960403BNA	40,000	38,400	28,000	26,880	97	3	17½	28⅞	34½	112
GD9T960603BNA	60,000	57,600	42,000	40,320	97	3	17½	28⅞	34½	115
GD9T960803BNA	80,000	76,800	56,000	53,760	96	3	17½	28⅞	34½	118
GD9T961005CNA	100,000	96,000	70,000	67,200	96	5	21"	28⅞	34½	140

¹ BTU/H ² @ 0.1"–0.8" ESP

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Energy-efficient, multi-speed ECM blower motor
- Heavy-duty, aluminized-steel tubular heat exchanger
- Stainless-steel secondary heat exchanger
- Two-stage gas valve provides quiet, economical heating
- Durable Silicon Nitride igniter
- Quiet two-speed induced draft blower
- Self-diagnostic control board with constant memory fault code history output to a LED
- Color-coded low-voltage terminals with provisions for electronic air cleaner and humidifier
- Low continuous fan speed options offer quiet air circulation
- All models comply with California 40 ng/J Low NOx emissions standard
- Can not be installed in California's South Coast Air Quality Management District (SCAQMD) and San Joaquin Valley Air Pollution Control District (SJVAPCD).
- AHRI Certified; ETL Listed

Cabinet Features

- Designed for multi-position installation — GR9T96: upflow, horizontal left or right GD9T96: downflow, horizontal left or right
- Certified for direct vent (2-pipe) or non-direct vent (1-pipe)
- Easy-to-install top venting with optional side venting — GR9T96/upflow models only
- Convenient left or right connection for gas and electrical service
- Cabinet air leakage (QLeak) ≤ 2%
- Heavy-gauge steel cabinet with durable finish
- Fully insulated heat exchanger and blower section
- Airtight solid bottom or side return with easy-cut tabs for effortless removal in bottom air-inlet applications



R32

10 YEAR UNIT REPLACEMENT LIMITED WARRANTY | **10 YEAR** PARTS LIMITED WARRANTY | **20 YEAR** HEAT EXCHANGER LIMITED WARRANTY + **ONE-TIME** HEAT EXCHANGER REPLACEMENT LIMITED WARRANTY (FOR YEARS 21-99)

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Unit Replacement Limited Warranty, 10-Year Parts Limited Warranty, and 99-Year Heat Exchanger Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

GR9S96 (R-32) | SINGLE-STAGE GAS FURNACE

UP TO 97% AFUE | MULTI-SPEED ECM

GAS
FURNACES

Model	Heating Capacity ¹		AFUE %	Tons A/C ²	Dimensions			Ship Weight (lbs)
	Input	Output			W"	D"	H"	
GR9S960403AN	40,000	38,400	97	3	14"	28 ⁷ / ₈	34 ¹ / ₂	108
GR9S960603BN	60,000	57,600	97	3	17 ¹ / ₂	28 ⁷ / ₈	34 ¹ / ₂	118
GR9S960803BN	80,000	76,800	96	3	17 ¹ / ₂	28 ⁷ / ₈	34 ¹ / ₂	118
GR9S960804CN	80,000	76,800	97	4	21"	28 ⁷ / ₈	34 ¹ / ₂	141
GR9S960805CN	80,000	76,800	97	5	21"	28 ⁷ / ₈	34 ¹ / ₂	142
GR9S961005CN	100,000	96,000	96	5	21"	28 ⁷ / ₈	34 ¹ / ₂	144
GR9S961205DN	120,000	115,200	96	5	24 ¹ / ₂	28 ⁷ / ₈	34 ¹ / ₂	156

¹ BTU/h ² Max tons @ 0.5" ESP

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Heavy-duty aluminized-steel tubular heat exchanger
- Stainless-steel secondary heat exchanger
- Single-stage gas valve
- Durable Silicon Nitride igniter
- Quiet single-speed induced draft blower
- Self-diagnostic control board with constant memory fault code history output to a LED
- All models comply with California 40 ng/J Low NOx emissions standard
- Can not be installed in California's South Coast AirQuality Management District (SCAQMD) and San Joaquin Valley Air Pollution Control District (SJVAPCD).
- AHRI Certified; ETL Listed

Cabinet Features

- Designed for multi-position installation — GR9S96: upflow, horizontal left or right GD9S96: downflow, horizontal left or right
- Certified for direct vent (2-pipe or non-direct vent (1-pipe)
- Easy-to-install top venting with optional side venting
- Convenient left or right connection for gas and electrical service
- Cabinet air leakage (QLeak) ≤ 2%
- Heavy-gauge steel cabinet with durable finish
- Fully insulated heat exchanger and blower section
- Airtight solid bottom or side return with easy-cut tabs for effortless removal in bottom air-inlet applications



R32



10 YEAR UNIT REPLACEMENT LIMITED WARRANTY | **10 YEAR** PARTS LIMITED WARRANTY | **20 YEAR** HEAT EXCHANGER LIMITED WARRANTY + **ONE-TIME** HEAT EXCHANGER REPLACEMENT LIMITED WARRANTY (FOR YEARS 21-99)

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Unit Replacement Limited Warranty, 10-Year Parts Limited Warranty, and 99-Year Heat Exchanger Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

GD9S96 (R-32) | SINGLE-STAGE GAS FURNACE

UP TO 97% AFUE | ENERGY-EFFICIENT, MULTI-SPEED ECM

Model	Heating Capacity ¹		AFUE %	Tons A/C ²	Dimensions			Ship Weight (lbs)
	Input	Output			W"	D"	H"	
GD9S960403BN	40,000	38,440	97	2	17½	28⅞	34½	113
GD9S960603BNA	60,000	57,660	96	3	17½	28⅞	34½	116
GD9S960804CN	80,000	76,880	96	4	21"	28⅞	34½	141
GD9S961005CN	100,000	95,000	95	5	21"	28⅞	34½	144
GD9S961205DN	120,000	114,000	95	5	24½	28⅞	34½	156

¹ BTU/h ² Max tons @ 0.5" ESP

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Heavy-duty aluminized-steel tubular heat exchanger
- Stainless-steel secondary heat exchanger
- Single-stage gas valve
- Durable Silicon Nitride igniter
- Quiet single-speed induced draft blower
- Self-diagnostic control board with constant memory fault code history output to a LED
- All models comply with California 40 ng/J Low NOx emissions standard
- Can not be installed in California's South Coast AirQuality Management District (SCAQMD) and San Joaquin Valley Air Pollution Control District (SJVAPCD).
- AHRI Certified; ETL Listed

Cabinet Features

- Designed for multi-position installation — GR9S96: upflow, horizontal left or right GD9S96: downflow, horizontal left or right
- Certified for direct vent (2-pipe or non-direct vent (1-pipe))
- Easy-to-install top venting with optional side venting
- Convenient left or right connection for gas and electrical service
- Cabinet air leakage (QLeak) ≤ 2%
- Heavy-gauge steel cabinet with durable finish
- Fully insulated heat exchanger and blower section
- Airtight solid bottom or side return with easy-cut tabs for effortless removal in bottom air-inlet applications



R32

10 YEAR UNIT REPLACEMENT LIMITED WARRANTY* | **10 YEAR** PARTS LIMITED WARRANTY* | **20 YEAR** HEAT EXCHANGER LIMITED WARRANTY* + **ONE-TIME** HEAT EXCHANGER REPLACEMENT LIMITED WARRANTY* (FOR YEARS 21-99)

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Unit Replacement Limited Warranty, 10-Year Parts Limited Warranty, and 99-Year Heat Exchanger Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

GR9S92 (R-32) | SINGLE-STAGE GAS FURNACE

UP TO 92% AFUE | MULTI-SPEED ECM

GAS
FURNACES

Model	Heating Capacity ¹		AFUE %	Tons A/C ²	Dimensions			Ship Weight (lbs)
	Input	Output			W"	D"	H"	
GR9S920403A*	40,000	36,840	92	3	14"	28 ⁷ / ₈	34 ¹ / ₂	106
GR9S920603B*	60,000	55,260	92	3	17 ¹ / ₂	28 ⁷ / ₈	34 ¹ / ₂	114
GR9S920803B*	80,000	73,680	92	3	17 ¹ / ₂	28 ⁷ / ₈	34 ¹ / ₂	117
GR9S920804C*	80,000	73,680	92	4	21"	28 ⁷ / ₈	34 ¹ / ₂	139
GR9S920805C*	80,000	73,680	92	5	21"	28 ⁷ / ₈	34 ¹ / ₂	140
GR9S921004C*	100,000	92,100	92	4	21"	28 ⁷ / ₈	34 ¹ / ₂	141
GR9S921005C*	100,000	92,100	92	5	21"	28 ⁷ / ₈	34 ¹ / ₂	142
GR9S921205D*	120,000	110,520	92	5	24 ¹ / ₂	28 ⁷ / ₈	34 ¹ / ₂	154

¹ BTU/h ² Max tons @ 0.5" ESP

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Heavy-duty aluminized-steel tubular heat exchanger
- Stainless-steel secondary heat exchanger
- Single-stage gas valve
- Durable Silicon Nitride igniter
- Multi-speed ECM blower motor
- Quiet single-speed induced draft blower
- Self-diagnostic control board
- All models comply with California 40 ng/J Low NOx emissions standard
- Can no longer be installed in California's South Coast Air Quality Management District (SCAQMD) on or after October 1, 2019.
- AHRI Certified; ETL Listed

Cabinet Features

- Designed for multi-position installation — GM9S92: upflow, horizontal left or right
- Certified for direct vent (2-pipe) or non-direct vent (1-pipe)
- Easy-to-install top venting with optional side venting — GM9S92: upflow models only
- Convenient left or right connection for gas and electrical service
- Cabinet air leakage (QLeak) ≤ 2%
- Heavy-gauge steel cabinet with durable finish
- Foil-faced insulated heat exchanger cabinet
- Airtight solid bottom or side return with easy-cut tabs for effortless removal in bottom air-inlet applications



R32

10 YEAR PARTS LIMITED WARRANTY | **20 YEAR HEAT EXCHANGER LIMITED WARRANTY** + **ONE-TIME REPLACEMENT LIMITED WARRANTY (FOR YEARS 21-99)**

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Parts Limited Warranty, and 99-Year Heat Exchanger Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

GRVT80 / GDVT80 | TWO-STAGE GAS FURNACE

80% AFUE | ENERGY-EFFICIENT, VARIABLE-SPEED



Model	High-Fire Heating ¹		Low-Fire Heating ¹		AFUE %	Tons A/C ²	Dimensions			Ship Weight (lbs)
	Input	Output	Input	Output			W"	D"	H"	
GRVT800603B*	60,000	48,000	42,000	33,600	80	1½ to 3	17½	28	33¾	105
GRVT800604B*	60,000	48,000	42,000	33,600	80	1½ to 4	17½	28	33¾	107
GRVT800803B*	80,000	64,000	56,000	44,800	80	1½ to 3	17½	28	33¾	110
GRVT800804C*	80,000	64,000	56,000	44,800	80	3 to 4	21	28	33¾	118
GRVT800805C*	80,000	64,000	56,000	44,800	80	2 to 5	21	28	33¾	121
GRVT800805D*	80,000	64,000	56,000	44,800	80	2½ to 5	24½	28	33¾	129
GRVT801005C*	100,000	80,000	70,000	56,000	80	2 to 5	21	28	33¾	124
GDVT800603BX	60,000	48,000	42,000	33,600	80	1½ to 3	17½	28	33¾	105
GDVT800803BX	80,000	64,000	56,000	44,800	80	1½ to 3	17½	28	33¾	109
GDVT800805CX	80,000	64,000	56,000	44,800	80	2 to 5	21	28	33¾	125
GDVT801005CX	100,000	80,000	70,000	56,000	80	2 to 5	21	28	33¾	129

¹ BTU/h ² Max tons @ 0.5" ESP

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Integrated communicating ComfortBridge™ technology
- Two-stage gas valve provides quiet, economical heating
- Commissioning and diagnostics via on board Bluetooth with the CoolCloud™ phone and tablet application
- Efficient and quiet variable-speed ECM circulator motor gently ramps up or down according to heating or cooling demand
- SureStart® Silicon Nitride igniter designed for long igniter life
- Self-diagnostic control board with constant memory fault code history output to a triple 7-segment display
- Low constant fan speed circulates air throughout the home
- Quiet, two-speed induced draft blower
- California Low NO_x emissions-compliant models available
- Can no longer be installed in California's South Coast Air Quality Management District (SCAQMD) on or after October 1, 2019.
- AHRI Certified; ETL Listed

Cabinet Features

- Fully insulated, heavy-gauge steel cabinet with durable baked-enamel finish
- Multi-position installation:
GRVT80: upflow, horizontal left or right
GDVT80: downflow, horizontal left or right
- Removable bottom for side- or bottom-return applications
- Convenient left or right connection for gas/electric service
- Cabinet air leakage ≤ 2%
- Coil and furnace fit flush for most installations



R32

10 YEAR UNIT REPLACEMENT LIMITED WARRANTY* | **10 YEAR** PARTS LIMITED WARRANTY* | **20 YEAR** HEAT EXCHANGER REPLACEMENT LIMITED WARRANTY* | **ONE-TIME** HEAT EXCHANGER REPLACEMENT LIMITED WARRANTY* (FOR YEARS 21-99)

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Unit Replacement Limited Warranty, 10-Year Parts Limited Warranty, and 99-Year Heat Exchanger Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

GRVS80-U | ULTRA LOW NOX | SINGLE-STAGE GAS FURNACE



80% AFUE | ENERGY-EFFICIENT, VARIABLE-SPEED ECM

GAS
FURNACES

Model	Heating Capacity ¹		AFUE %	Tons A/C ²	Dimensions			Ship Weight (lbs)
	Input	Output			W"	D"	H"	
GRVS800604BUA*	60,000	48,000	80	1½ to 4	17½	28	33¾	112
GRVS800805CUA*	80,000	64,000	80	2 to 5	21	28	33¾	127

¹ BTU/h ² Max tons @ 0.5" ESP

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Integrated communicating ComfortBridge™ Technology
- Commissioning and diagnostics via indoor board Bluetooth with the CoolCloud™ phone and tablet application
- Heavy-duty stainless-steel dual diameter tubular heat exchanger
- Single-stage gas valve
- Durable Hot-surface igniter
- Quiet, modulating draft inducer
- Self-diagnostic control board
- Variable-speed ECM blower motor
- Eligible for installation in California's South Coast Air Quality Management District (SCAQMD) and San Joaquin Valley Air Pollution Control District (SJVUAPCD). This furnace complies with the 14 ng/J NOx emission limit in SCAQMD Rule 1111 and SJVUAPCD Rule 4905.
- EMI line filter kit must be installed. (It is intended for field installation only on "VS" model, Bluetooth® capable Ultra Low NOx Gas Furnaces. The purpose of the EMI Filter is to reduce electromagnetic interference between the furnace and other electrical devices)
- AHRI Certified; ETL Listed

Cabinet Features

- Installation: upflow, horizontal left or right
- Convenient left or right connection for gas and electrical service
- Heavy-gauge steel cabinet with durable baked-enamel finish
- Foil faced insulated heat exchanger



R32

10 YEAR UNIT REPLACEMENT LIMITED WARRANTY | **10 YEAR** PARTS LIMITED WARRANTY | **20 YEAR** HEAT EXCHANGER LIMITED WARRANTY | **ONE-TIME** HEAT EXCHANGER REPLACEMENT LIMITED WARRANTY* (FOR YEARS 21-99)

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Unit Replacement Limited Warranty, 10-Year Parts Limited Warranty, and 99-Year Heat Exchanger Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

GR9S80-U | ULTRA LOW NOX | SINGLE-STAGE GAS FURNACE

80% AFUE | ENERGY-EFFICIENT, MULTI-SPEED ECM

Model	Heating Capacity ¹		AFUE %	Tons A/C ²	Dimensions			Ship Weight (lbs)
	Input	Output			W"	D"	H"	
GR9S800403A*	40,000	32,000	80	3	14"	28 ⁷ / ₈	34 ¹ / ₂	86
GR9S800603A*	60,000	48,000	80	3	14"	28 ⁷ / ₈	34 ¹ / ₂	90
GR9S800603B*	60,000	48,000	80	3	17 ¹ / ₂	28 ⁷ / ₈	34 ¹ / ₂	100
GR9S800604B*	60,000	48,000	80	4	17 ¹ / ₂	28 ⁷ / ₈	34 ¹ / ₂	108
GR9S800803B*	80,000	64,000	80	3	17 ¹ / ₂	28 ⁷ / ₈	34 ¹ / ₂	116
GR9S800804B*	80,000	64,000	80	4	17 ¹ / ₂	28 ⁷ / ₈	34 ¹ / ₂	120
GR9S800804C*	80,000	64,000	80	4	21"	28 ⁷ / ₈	34 ¹ / ₂	132
GR9S800805C*	80,000	64,000	80	5	21"	28 ⁷ / ₈	34 ¹ / ₂	132
GR9S801005C*	100,000	80,000	80	5	21"	28 ⁷ / ₈	34 ¹ / ₂	132
GR9S801205D*	120,000	96,000	80	5	24 ¹ / ₂	28 ⁷ / ₈	34 ¹ / ₂	132

¹ BTU/h ² Max tons @ 0.5" ESP

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Heavy-duty stainless-steel dual-diameter tubular heat exchanger
- Single-stage gas valve
- Durable Hot-surface igniter
- Quiet, modulating draft inducer
- Self-diagnostic control board
- Multi-speed ECM blower motor
- Eligible for installation in California's South Coast Air Quality Management District (SCAQMD) and San Joaquin Valley Air Pollution Control District (SJVUAPCD). This furnace complies with the 14 ng/J NOx emission limit in SCAQMD Rule 1111 and SJVUAPCD Rule 4905.
- AHRI Certified; ETL Listed

Cabinet Features

- Installation: upflow, horizontal left or right
- Convenient left or right connection for gas and electrical service
- Heavy-gauge steel cabinet with durable baked-enamel finish
- Foil faced insulated heat exchanger

R32



10 YEAR UNIT REPLACEMENT LIMITED WARRANTY | **10 YEAR** PARTS LIMITED WARRANTY | **20 YEAR** HEAT EXCHANGER LIMITED WARRANTY + **ONE-TIME** HEAT EXCHANGER REPLACEMENT LIMITED WARRANTY (FOR YEARS 21-99)

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Unit Replacement Limited Warranty, 10-Year Parts Limited Warranty, and 99-Year Heat Exchanger Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

GR9T80 (R-32) | TWO-STAGE GAS FURNACE

80% AFUE | ENERGY-EFFICIENT, 9-SPEED ECM

GAS
FURNACES

Model	High-Fire Heating ¹		Low-Fire Heating ¹		AFUE %	Tons A/C ²	Dimensions			Ship Weight (lbs)
	Input	Output	Input	Output			W"	D"	H"	
GR9T800403A*	40,000	32,000	28,000	22,400	80	3	14	28	33 ³ / ₈	105
GR9T800603B*	60,000	48,000	42,000	33,600	80	3	17 ¹ / ₂	28	33 ³ / ₈	107
GR9T800803B*	80,000	64,000	56,000	44,800	80	3	17 ¹ / ₂	28	33 ³ / ₈	118
GR9T800804B*	80,000	64,000	56,000	44,800	80	4	17 ¹ / ₂	28	33 ³ / ₈	121
GR9T800804C*	80,000	64,000	56,000	44,800	80	4	21	28	33 ³ / ₈	129
GR9T800805C*	80,000	64,000	56,000	44,800	80	5	21	28	33 ³ / ₈	129
GR9T800805DX	80,000	64,000	56,000	44,800	80	5	24 ¹ / ₂	28	33 ³ / ₈	129
GR9T801004CN	100,000	80,000	70,000	56,000	80	4	21	28	33 ³ / ₈	124
GR9T801005C*	100,000	80,000	70,000	56,000	80	5	21	28	33 ³ / ₈	124
GR9T801205D*	120,000	96,000	84,000	67,200	80	5	24 ¹ / ₂	28	33 ³ / ₈	124

¹ BTU/h ² Max tons @ 0.5" ESP

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Two-stage gas valve provides quiet, economical heating
- Efficient and quiet multi-speed ECM circulator motor
- SureStart® Silicon Nitride igniter designed for long igniter life
- Self-diagnostic control board
- Low constant fan speed circulates air throughout the home
- Quiet, two-speed induced draft blower
- California Low NOx emissions-compliant models available
- Can not be installed in California's South Coast AirQuality Management District (SCAQMD) and San Joaquin Valley Air Pollution Control District (SJVAPCD).
- AHRI Certified; ETL Listed

Cabinet Features

- Fully insulated, heavy-gauge steel cabinet with durable baked-enamel finish
- Multi-position installation: GR9T80: upflow, horizontal left or right GD9T80: downflow, horizontal left or right
- Removable bottom for side- or bottom-return applications
- Convenient left or right connection for gas/electric service
- Cabinet air leakage ≤ 2%
- Coil and furnace fit flush for most installations



R32

10 YEAR UNIT REPLACEMENT LIMITED WARRANTY | **10 YEAR** PARTS LIMITED WARRANTY | **20 YEAR** HEAT EXCHANGER LIMITED WARRANTY + **ONE-TIME** HEAT EXCHANGER REPLACEMENT LIMITED WARRANTY (FOR YEARS 21-99)

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Unit Replacement Limited Warranty, 10-Year Parts Limited Warranty, and 99-Year Heat Exchanger Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

GD9T80 (R-32) | TWO-STAGE GAS FURNACE

80% AFUE | ENERGY-EFFICIENT, 9-SPEED ECM

Model	High-Fire Heating ¹		Low-Fire Heating ¹		AFUE %	Tons A/C ²	Dimensions			Ship Weight (lbs)
	Input	Output	Input	Output			W"	D"	H"	
GD9T800403AX	40,000	32,000	28,000	22,400	80	3	14	28	33 ³ / ₈	105
GD9T800603AX	60,000	48,000	42,000	33,600	80	3	14	28	33 ³ / ₈	107
GD9T800603BX	60,000	48,000	42,000	33,600	80	3	17 ¹ / ₂	28	33 ³ / ₈	107
GD9T800804BX	80,000	64,000	56,000	44,800	80	4	17 ¹ / ₂	28	33 ³ / ₈	121
GD9T800805CX	80,000	64,000	56,000	44,800	80	5	21	28	33 ³ / ₈	129
GD9T801005CX	100,000	80,000	70,000	56,000	80	5	21	28	33 ³ / ₈	124

¹ BTU/h ² Max tons @ 0.5" ESP

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Heavy-duty stainless-steel dual-diameter tubular heat exchanger
- Single-stage gas valve
- Durable Hot-surface igniter
- Quiet, modulating draft inducer
- Self-diagnostic control board
- Multi-speed ECM blower motor
- Eligible for installation in California's South Coast Air Quality Management District (SCAQMD) and San Joaquin Valley Air Pollution Control District (SJVUAPCD). This furnace complies with the 14 ng/J NOx emission limit in SCAQMD Rule 1111 and SJVUAPCD Rule 4905.
- AHRI Certified; ETL Listed

Cabinet Features

- Installation: upflow, horizontal left or right
- Convenient left or right connection for gas and electrical service
- Heavy-gauge steel cabinet with durable baked-enamel finish
- Foil faced insulated heat exchanger



R32

10 PARTS LIMITED YEAR WARRANTY | **20** HEAT EXCHANGER LIMITED YEAR WARRANTY | **ONE-TIME** HEAT EXCHANGER REPLACEMENT WARRANTY (FOR YEARS 21-99)

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Parts Limited Warranty, and 99-Year Heat Exchanger Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

GR9S80 (R-32) | SINGLE-STAGE GAS FURNACE

80% AFUE | ENERGY-EFFICIENT, MULTI-SPEED ECM

Model	High-Fire Heating ¹		Low-Fire Heating ¹		AFUE %	Tons A/C ²	Dimensions			Ship Weight (lbs)
	Input	Output	Input	Output			W"	D"	H"	
GR9S800403A*	40,000	32,000	80%	3	14	28	33 ³ / ₈	86	33 ³ / ₈	105
GR9S800603A*	60,000	48,000	80%	3	14	28	33 ³ / ₈	90	33 ³ / ₈	107
GR9S800603B*	60,000	48,000	80%	3	17 ¹ / ₂	28	33 ³ / ₈	100	33 ³ / ₈	118
GR9S800604B*	60,000	48,000	80%	4	17 ¹ / ₂	28	33 ³ / ₈	108	33 ³ / ₈	121
GR9S800803B*	80,000	64,000	80%	3	17 ¹ / ₂	28	33 ³ / ₈	116	33 ³ / ₈	129
GR9S800804B*	80,000	64,000	80%	4	17 ¹ / ₂	28	33 ³ / ₈	120	33 ³ / ₈	129
GR9S800804C*	80,000	64,000	80%	4	21	28	33 ³ / ₈	132	33 ³ / ₈	129
GR9S800805C*	80,000	64,000	80%	5	21	28	33 ³ / ₈	132	33 ³ / ₈	124
GR9S801005C*	100,000	80,000	80%	5	21	28	33 ³ / ₈	132	33 ³ / ₈	124
GR9S801205D*	120,000	96,000	80%	5	24 ¹ / ₂	28	33 ³ / ₈	132	33 ³ / ₈	124

¹ BTU/h ² Max tons @ 0.5" ESP

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Heavy-duty aluminized-steel dual diameter tubular heat exchanger
- Single-stage gas valve
- Durable Hot-surface igniter
- Quiet, single-speed draft induced
- Self-diagnostic control board
- Color-coded low-voltage terminals
- Multi-speed ECM blower motor
- California Low NOx emissions models available
- Can not be installed in California's South Coast Air Quality Management District (SCAQMD) and San Joaquin Valley Air Pollution Control District (SJVAPCD).
- AHRI Certified; ETL Listed

Cabinet Features

- Installation:
 - GR9S80 -upflow, horizontal left or right
- Convenient left or right connection for gas and electrical service
- Heavy-gauge steel cabinet with durable baked-enamel finish
- Foil faced insulated heat exchanger

**R32**

10 YEAR PARTS LIMITED WARRANTY | **20 YEAR HEAT EXCHANGER LIMITED WARRANTY** + **ONE-TIME HEAT EXCHANGER REPLACEMENT LIMITED WARRANTY (FOR YEARS 21-99)**

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Parts Limited Warranty, and 99-Year Heat Exchanger Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.

GD9S80 (R-32) | SINGLE-STAGE GAS FURNACE

80% AFUE | ENERGY-EFFICIENT, MULTI-SPEED ECM

Model	Heating Capacity ¹		AFUE %	Tons A/C ²	Dimensions			Ship Weight (lbs)
	Input	Output			W"	D"	H"	
GD9S800403A*	40,000	32,000	80%	3	14	28	33 ³ / ₈	90
GD9S800603A*	60,000	48,000	80%	3	14	28	33 ³ / ₈	94
GD9S800804B*	60,000	48,000	80%	4	17 ¹ / ₂	28	33 ³ / ₈	107
GD9S800805C*	80,000	64,000	80%	5	21	28	33 ³ / ₈	115
GD9S801005C*	100,000	80,000	80%	5	21	28	33 ³ / ₈	115

¹ BTU/h ² Max tons @ 0.5" ESP

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Heavy-duty aluminized-steel dual diameter tubular heat exchanger
- Single-stage gas valve
- Durable Hot-surface igniter
- Quiet, single-speed draft induced
- Self-diagnostic control board
- Color-coded low-voltage terminals
- Multi-speed ECM blower motor
- California Low NOx emissions models available
- Can not be installed in California's South Coast AirQuality Management District (SCAQMD) and San Joaquin Valley Air Pollution Control District (SJVAPCD).
- AHRI Certified; ETL Listed

Cabinet Features

- Installation:
 - GD9S80- downflow, horizontal left or right
- Convenient left or right connection for gas and electrical service
- Heavy-gauge steel cabinet with durable baked-enamel finish
- Foil faced insulated heat exchanger



R32

10 YEAR PARTS LIMITED WARRANTY | **20 YEAR HEAT EXCHANGER LIMITED WARRANTY** + **ONE-TIME HEAT EXCHANGER REPLACEMENT LIMITED WARRANTY (FOR YEARS 21-99)**

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Parts Limited Warranty, and 99-Year Heat Exchanger Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Changes in law, regulations, or technology may result in an equivalent unit not being available. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions, as well as rights and obligations should an equivalent unit not be available.



AIR HANDLERS & EVAPORATOR COILS



MBVB | MODULAR BLOWER

MULTI-POSITION



Model	Voltage	Dimensions			Ship Weight (lbs)
		W"	D"	H"	
MBVB12BP1X00	208/230-1	17½	21	26	67
MBVB16CP1X00	208/230-1	21	21	30	80
MBVB20DP1X00	208/230-1	24½	21	30	86

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Variable-speed ECM blower motor
- Integrated communicating ComfortBridge™ Technology
- Commissioning and diagnostics via on board Bluetooth with the CoolCloud™ phone and tablet application
- Advanced configuration of the airflow and tonnage in communicating mode
- Provides constant CFM over a wide range of static pressure conditions independent of duct system
- CFM indicator
- Fault recall of six most recent faults
- Provides adjustable low CFM for efficient fan-only operation
- Improved humidity and comfort control
- Built-in compatibility with multi-stage heat pump and cooling applications
- Blower section usable as electric heater
- AHRI certified; ETL listed

Cabinet Features

- Horizontal or vertical configuration capabilities
- 21" depth for easier attic access
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Cabinet air leakage less than 2% at 1.0 inch H₂O when tested in accordance with ASHRE standard 193
- Cabinet air leakage less than 1.4% at 0.5 inch H₂O when tested in accordance with ASHRE standard 193
- Field installed 3 kW–20 kW electric heater kits available
- Compatible with R-32 systems utilizing the R-32 integration kit



10 YEAR **PARTS LIMITED WARRANTY***

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.

115V MBVK | AIR HANDLER

VARIABLE-SPEED | ECM BASED, MODULAR BLOWER | MULTI-POSITION

AIR
HANDLERS

Model	Voltage	Dimensions			Ship Weight (lbs)
		W"	D"	H"	
MBVK12BP0X00	115-1	17½	21	26	67
MBVK16CP0X00	115-1	21	21	30	80
MBVK20DP0X00	115-1	24½	21	30	86

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Variable-speed ECM blower motor
- Compatible with Goodman brand smart thermostat and other Daikin communicating equipment
- Advanced configuration of the airflow and tonnage in communicating mode
- Provides constant CFM over a wide range of static pressure conditions independent of duct system
- CFM indicator
- Fault recall of six most recent faults
- Provides adjustable low CFM for efficient fan-only operation
- Improved humidity and comfort control
- Built-in compatibility with multi-stage heat pump and cooling applications
- UL 60335 2-40 Compliant
- AHRI certified; ETL listed

Cabinet Features

- Horizontal or vertical configuration capabilities
- 21" depth for easier attic access
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Cabinet air leakage less than 2% at 1.0 inch H₂O when tested in accordance with ASHRE standard 193
- Cabinet air leakage less than 1.4% at 0.5 inch H₂O when tested in accordance with ASHRE standard 193
- Compatible with R-32 systems utilizing the R-32 integration kit



**10 PARTS
YEAR LIMITED
WARRANTY***

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.

AHVE*13 (230V) (R-32) | AIR HANDLER

VARIABLE-SPEED | COMFORTBRIDGE™ CONTROLLER-COMPATIBLE | MULTI-POSITION



Model	Cooling (Tons)	Voltage	Dimensions			Service Valve		Ship Weight (lbs)
			W"	D"	H"	Liquid"	Suction"	
AHVE24BP1300	2.0Ton	208/230-1	17½	21	45	¾"	¾"	115
AHVE36CP1300	3.0Ton	208/230-1	21	21	53⅞	¾"	⅞"	140
AHVE42CP1300	3.5Ton	208/230-1	21	21	53⅞	¾"	⅞"	140
AHVE48CP1300	4.0Ton	208/230-1	21	21	58	¾"	⅞"	148
AHVE48DP1300	4.0Ton	208/230-1	24½	21	53⅞	¾"	⅞"	150
AHVE60DP1300	5.0Ton	208/230-1	24½	21	58	¾"	⅞"	167

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Electronic Expansion Valve (EEV) for cooling and heat pump applications.
- 7mm evaporator coil tube size
- Variable-speed ECM blower motor
- Compatible with Amana brand smart thermostat
- Provides constant CFM over a wide range of static pressure conditions independent of duct system
- CFM indicator
- Thermostat provides adjustable lowCFM for efficient fan-only operation
- All-aluminum evaporator coil
- Fault recall of six most recent faults
- Improved humidity and comfort control
- AHRI certified; ETL listed
- Coil mounting track for quick repositioning
- Rigid SmartFrame™ cabinet
- UL 60335 2-40 Compliant
- Factory installed R-32 sensor designed for the lifespan of the coil
- Optimized for use with R-32 refrigerant
- Field Installed 3 kW – 25 kW electric heatkits available

Cabinet Features

- Cabinet air leakage less than 2.0% at 1.0 inch H₂O when tested in accordance with ASHRAE standard 193
- Cabinet air leakage less than 1.4% at 0.5 inch H₂O when tested in accordance with ASHRAE standard 193
- Horizontal or vertical configuration capabilities
- 21" depth for easier attic access
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Screw-less sides and back helps to reduce condensation when installed in humid locations
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Glue-less cabinet insulation retention
- Tool-less filter access



R32

**10 PARTS
YEAR LIMITED
WARRANTY***

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.



AHVE*03 (115V) (R-32) | AIR HANDLER

VARIABLE-SPEED | COMFORTBRIDGE™ CONTROLLER-COMPATIBLE | MULTI-POSITION

AIR
HANDLERS

Model	Cooling (Tons)	Voltage	Dimensions			Service Valve		Ship Weight (lbs)
			W"	D"	H"	Liquid"	Suction"	
AHVE24BP0300	2.0Ton	115-1	17½	21	45	¾"	¾"	115
AHVE36CP0300	3.0Ton	115-1	21	21	53⅞	¾"	⅞"	140
AHVE42CP0300	3.5Ton	115-1	21	21	53⅞	¾"	⅞"	140
AHVE48CP0300	4.0Ton	115-1	21	21	58	¾"	⅞"	148
AHVE48DP0300	4.0Ton	115-1	24½	21	53⅞	¾"	⅞"	150
AHVE60DP0300	5.0Ton	115-1	24½	21	58	¾"	⅞"	167

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Electronic Expansion Valve (EEV) for cooling and heat pump applications.
- 7mm evaporator coil tube size
- Variable-speed ECM blower motor
- Compatible with Goodman smart thermostat
- Provides constant CFM over a wide range of static pressure conditions independent of duct system
- CFM indicator
- Thermostat provides adjustable lowCFM for efficient fan-only operation
- All-aluminum evaporator coil
- Fault recall of six most recent faults
- Improved humidity and comfort control
- AHRI certified; ETL listed
- Coil mounting track for quick repositioning
- Rigid SmartFrame™ cabinet
- Factory installed R-32 sensor designed for the lifespan of the coil
- Optimized for use with R-32 refrigerant
- UL 60335 2-40 Compliant

Cabinet Features

- Cabinet air leakage less than 2.0% at 1.0 inch H₂O when tested in accordance with ASHRAE standard 193
- Cabinet air leakage less than 1.4% at 0.5 inch H₂O when tested in accordance with ASHRAE standard 193
- Horizontal or vertical configuration capabilities
- 21" depth for easier attic access
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Screw-less sides and back helps to reduce condensation when installed in humid locations
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Glue-less cabinet insulation retention
- Tool-less filter access



R32

10 YEAR PARTS LIMITED WARRANTY*

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.

AMST*13 (R-32) | AIR HANDLER



MULTI-POSITION, MULTI-SPEED

Model	Cooling Capacity (Tons)	Voltage (VAC)	Dimensions			Service Valve		Ship Weight (lbs)
			W"	D"	H"	Liquid"	Suction"	
AMST24BU1300**	2	208/230-1	17½	21	45	¾"	¾"	129
AMST30BU1300**	2½	208/230-1	17½	21	53 1/2	¾"	7/8"	129
AMST36BU1300**	3	208/230-1	17½	21	53 1/2	¾"	7/8"	129
AMST36CU1300**	3	208/230-1	21	21	49	¾"	¾"	153
AMST42CU1300**	3½	208/230-1	21	21	53 1/2	¾"	7/8"	153
AMST48CU1300**	4	208/230-1	21	21	58	¾"	7/8"	153
AMST60DU1300**	5	208/230-1	24½	21	58	¾"	7/8"	167

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Internal factory-installed thermal expansion valves for cooling and heat pump applications
- Direct drive, multi-speed ECM blower motor
- All-aluminum evaporator coil
- Coil mounting track for quick repositioning
- Optimized for use with R-32 refrigerant
- Cabinet air leakage less than 2.0% at 1.0 inch H₂O when tested in accordance with ASHRAE standard 193
- Cabinet air leakage less than 1.4% at 0.5 inch H₂O when tested in accordance with ASHRAE standard 193
- AHRI certified; ETL listed
- UL 60335 2-40 Compliant
- Factory installed R32 sensor designed for lifespan of coil
- Rigid SmartFrame™ cabinet
- Horizontal or vertical configuration capabilities
- 21" depth for easier attic access
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Screw-less sides and back helps to reduce condensation when installed in humid locations
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Glue-less cabinet insulation retention
- Tool-less filter access
- Field Installed 3 kW – 25 kW electric heater kits available



R32

10 YEARS PARTS LIMITED WARRANTY*

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.



AWST*13 (R-32) | AIR HANDLER

WALL-MOUNT

AIR
HANDLERS

Model	Cooling Capacity (Tons)	Electric Heat (kW)	Voltage (VAC)	Dimensions			Service Valve		Ship Weight (lbs)
				W"	D"	H"	Liquid"	Suction"	
AWST18SU1303	1½	3	208/230	20¾ ₁₆	16½	36	¾	5⁄8	84
AWST18SU1305	1½	5	208/230	20¾ ₁₆	16½	36	¾	5⁄8	84
AWST18SU1308	1½	8	208/230	20¾ ₁₆	16½	36	¾	5⁄8	84
AWST24SU1305	2	5	208/230	20¾ ₁₆	16½	36	¾	5⁄8	84
AWST24SU1308	2	8	208/230	20¾ ₁₆	16½	36	¾	5⁄8	84
AWST24SU1310	2	10	208/230	20¾ ₁₆	16½	36	¾	5⁄8	84
AWST30LU1305	2½	5	208/230	24	21	36	¾	¾	109
AWST30LU1308	2½	8	208/230	24	21	36	¾	¾	109
AWST30LU1310	2½	10	208/230	24	21	36	¾	¾	109
AWST36LU1305	3	5	208/230	24	21	36	¾	¾	109
AWST36LU1308	3	8	208/230	24	21	36	¾	¾	109
AWST36LU1310	3	10	208/230	24	21	36	¾	¾	109

Standard Features

- AWST Models: Equipped with a fully adjustable TXV
- Direct-drive, multi-speed motors allows air volume variation for heating/cooling
- Sequence-controlled, rust-resistant nickel chromium heating elements of 3, 5, 8, and 10 kW
- Aluminum tubing coils on all models
- Cabinet air leakage less than 2.0% at 1.0 inch H₂O when tested in accordance with ASHRAE standard 193
- UL 60335 2-40 Compliant
- Factory installed R-32 sensor designed for the lifespan of the coil.
- Cabinet air leakage less than 1.4% at 0.5 inch H₂O when tested in accordance with ASHRAE standard 193
- Factory-installed pull-type disconnect
- Optimized for use with R-32 refrigerant
- Thermoplastic drain pan with bottom primary and secondary drain connections
- Built-in filter rack (filter included)
- Large chassis (2½- and 3-ton units) – front return only
- Small chassis (1½- and 2-ton units) – front or bottom return
- Wall-hanging bracket provided
- AHRI Certified; ETL Listed



R32

**10 PARTS
YEAR LIMITED
WARRANTY***

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.

AMVT*13 | AIR HANDLER

MULTI-POSITION | VARIABLE-SPEED | HIGH-EFFICIENCY



Model	Cooling (Tons)	Voltage	Dimensions			Service Valve		Ship Weight (lbs)
			W"	D"	H"	Liquid"	Suction"	
AMVT24BP1300	1½	208/230-1	17½	21	45	¾"	¾"	117
AMVT30BP1300	2	208/230-1	17½	21	53 1/2	¾"	7/8"	134
AMVT36BP1300	2½	208/230-1	17½	21	49	¾"	7/8"	134
AMVT36CP1300	3	208/230-1	21	21	45	¾"	¾"	158
AMVT42CP1300	3½	208/230-1	21	21	53 1/2	¾"	7/8"	158
AMVT48CP1300	4	208/230-1	21	21	53 1/2	¾"	7/8"	158
AMVT60DP1300	5	208/230-1	24½	21	53 1/2	¾"	7/8"	172

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Internal factory-installed thermal expansion valves for cooling and heat pump applications
- Variable-speed ECM blower motor
- Integrated communicating ComfortBridge™ Technology
- Commissioning and diagnostics via on board Bluetooth with the CoolCloud™ phone and tablet application
- Auto configuration of the airflow and tonnage in communicating mode
- Provides constant CFM over a wide range of static pressure conditions independent of duct system
- CFM indicator
- Fault recall of six most recent faults
- Provides adjustable low CFM for efficient fan-only operation
- Improved humidity and comfort control
- Built-in compatibility with multi-stage heat pump and cooling applications
- Factory installed R-32 sensor designed for the lifespan of the coil
- Optimized for use with R-32 refrigerant
- All-aluminum evaporator coil
- AHRI certified; ETL listed

Cabinet Features

- Rigid SmartFrame™ cabinet
- Cabinet air leakage less than 2.0% at 1.0 inch H₂O when tested in accordance with ASHRAE standard 193
- Cabinet air leakage less than 1.4% at 0.5 inch H₂O when tested in accordance with ASHRAE standard 193
- Horizontal or vertical configuration capabilities
- 21" depth for easier attic access
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Screw-less sides and back helps to reduce condensation when installed in humid locations
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Glue-less cabinet insulation retention
- Tool-less filter access
- Field Installed 3 kW–25 kW electric heater kits available



R32

**10 PARTS
YEAR LIMITED
WARRANTY***

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.



ACST*13 (R-32) | AIR HANDLER

CEILING-MOUNT

AIR
HANDLERS

Model	Cooling Capacity (Tons)	Electric Heat (kW)	Voltage (VAC)	Dimensions			Service Valve		Ship Weight (lbs)
				W"	D"	H"	Liquid"	Suction"	
ACST18MU1305AA	1½	5	208/230	48 1/5	22 1/4	11	3/8	3/4	85
ACST18MU1308AA	1½	8	208/230	48 1/5	22 1/4	11	3/8	3/4	85
ACST24LU1305AA	2	5	208/230	54 1/5	22 1/4	11	3/8	3/4	97
ACST24LU1306AA	2	6	208/230	54 1/5	22 1/4	11	3/8	3/4	97
ACST24LU1308AA	2	8	208/230	54 1/5	22 1/4	11	3/8	3/4	97
ACST24LU1310AA	2	10	208/230	54 1/5	22 1/4	11	3/8	3/4	97
ACST30LU1305AA	2½	5	208/230	54 1/5	22 1/4	11	3/8	3/4	97
ACST30LU1306AA	2½	6	208/230	54 1/5	22 1/4	11	3/8	3/4	97
ACST30LU1308AA	2½	8	208/230	54 1/5	22 1/4	11	3/8	3/4	97
ACST30LU1310AA	2½	10	208/230	54 1/5	22 1/4	11	3/8	3/4	97

Standard Features

- All-Aluminum tube/aluminum fin coil
- Direct-drive, resilient-mount, multi-speed motor
- Sequence-controlled and rust-resistant nickel chromium heating elements of 5, 6, 8 and 10 kW
- High-efficiency evaporator coil
- Quiet operation
- ACST Models: Equipped with a factory installed and fully adjustable TXV for improved performance
- Factory installed casing along with mounting brackets for all tonnages
- Configurable front and bottom return for all tonnages
- Factory installed R-32 sensor designed for the lifespan of the coil
- AHRI Certified; ETL Listed
- Primary/secondary drain connection in a high-temperature plastic drain pan
- Suitable for free-return installation (non-ducted return air)
- Galvanized-steel construction
- Factory-installed pull-type disconnect
- Easy service access
- Optimized for the use with R-32 refrigerant
- Cabinet air leakage less than 2% at 1 inch H₂O when tested in accordance with ASHRAE standard 193
- Cabinet air leakage less than 1.4% at 1 inch H₂O when tested in accordance with ASHRAE standard 193



R32

**10 PARTS
YEAR LIMITED
WARRANTY***

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply. refer to complete warranty details for full list of limitations and exclusions.

MBVK / MBVK*H (R-32)

WALL-MOUNT



Model	Voltage	Dimensions			Ship Weight (lbs)
		W"	D"	H"	
MBVK12BP1X00	208/230	17½	21	26	67
MBVK16CP1X00	208/230	21	21	30	80
MBVK20DP1X00	208/230	24½	21	30	86
MBVK16CH1X00	208/230-1	21	21	30	72
MBVK16CH0X00	115	21	21	30	72

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Variable-speed ECM blower motor
- Advanced configuration of the airflow and tonnage in communicating mode
- Provides constant CFM over a wide range of static pressure conditions independent of duct system
- CFM indicator
- Fault recall of six most recent faults
- Provides adjustable low CFM for efficient fan-only operation
- Improved humidity and comfort control
- Blower section usable as electric heater
- Integrated communicating ComfortNet Technology
- Compatible with Amana Brand Smart Thermostat
- Engineered for compatibility with all Goodman SD families (Up to 19 SEER2)
- Compatible with R-410A and R-32 Refrigerant
- For R-32 compatibility utilize the integration kit
- Built-in dehumidification feature
- Blower section usable as an electric feature
- Control board includes a blower time-delay in the cooling mode
- AHRI certified; ETL listed
- UL 60335 2-40 Compliant

Cabinet Features

- Horizontal or vertical configuration capabilities
- 21" depth for easier attic access
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Cabinet air leakage less than 2% at 1.0 inch H₂O when tested in accordance with ASHRE standard 193
- Cabinet air leakage less than 1.4% at 0.5 inch H₂O when tested in accordance with ASHRE standard 193
- Field Installed 3 kW – 20 kW electric heater kits available
- Field installed 3 stage electric heater kits available (19 SEER2 SKUs only)



R32



10 YEAR PARTS LIMITED WARRANTY*

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.

Model	Dimensions				Nominal Tons	Connection		Ship Weight (lbs)
	W"	D"	H"	A"		Liquid"	Suction"	
CAPFA1818A3	14"	21"	18"	14"	1½	3/8"	3/4"	28
CAPFA1818B3	17½"	21"	18"	15½"	1½	3/8"	3/4"	34
CAPFA1818C3	21"	21"	18"	14"	1½	3/8"	3/4"	43
CAPFA2422A3	14"	21"	22"	18"	2	3/8"	3/4"	42
CAPFA2422B3	17½"	21"	22"	18"	2	3/8"	3/4"	42
CAPFA2422C3	21"	21"	22"	18"	2	3/8"	3/4"	42
CAPFA3022A3	14"	21"	22"	18"	2½	3/8"	3/4"	36
CAPFA3022B3	17½"	21"	22"	18"	2½	3/8"	3/4"	42
CAPFA3022C3	21"	21"	22"	18"	2½	3/8"	3/4"	42
CAPFA3022D3	24½"	21"	22"	18"	2½	3/8"	3/4"	53
CAPFA3626B3	17½"	21"	26"	22"	3	3/8"	7/8"	46
CAPFA3626C3	21"	21"	26"	22"	3	3/8"	7/8"	50
CAPFA3626D3	24½"	21"	26"	22"	3	3/8"	7/8"	61
CAPFA4226B3	17½"	21"	26"	22"	3½	3/8"	7/8"	46
CAPFA4226C3	21"	21"	26"	22"	3½	3/8"	7/8"	50
CAPFA4226D3	24½"	21"	26"	22"	3½	3/8"	7/8"	61
CAPFA6030C3	21"	21"	30"	26"	4	3/8"	7/8"	66
CAPFA6030D3	24½"	21"	30"	26"	5	3/8"	7/8"	69

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- All-Aluminum evaporator coil
- Optimized for use with R-32 refrigerant including circuits and manifolds
- R-32 sensor designed for the life span of the coil
- 7mm tubes designed with patented grooves to maximize heat transfer
- Optimized metering devices (piston)
- Standardized copper suction tube stub length
- 21" depth for easier attic access
- Single front access panel
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Rust resistant, thermoplastic drain pans featuring a low water-retention design
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Drain pan rails designed to remove and reposition coils with ease without compromising structural integrity
- UV-resistant drain pan
- AHRI certified; ETL listed



R32

10 YEAR PARTS LIMITED WARRANTY

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.

CAHEA (R-32) | EVAPORATOR COIL

AlumaFin⁷
Evaporator Coil



PAINTED CASED | EEV | MULTI-POSITION

Model	Dimensions			Nominal Tons	Connection		Ship Weight (lbs)
	W"	D"	H"		Liquid"	Suction"	
CAHEA3630C3	21"	21"	30"	2, 3, 5	5/16 or 3/8"	3/4 or 7/8"	58

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

*Works with MBVK*H modular blower (sold separately)

Standard Features

- All-Aluminum evaporator coil
- Optimized for use with R-32 refrigerant including circuits and manifolds
- R-32 sensor designed for the life span of the coil
- Optimized metering devices (piston)
- CAHEA models feature:
 - Factory-installed electronic expansion valve (EEV) for precise refrigerant control
 - Cooling and heat pump applications
 - Fault recall of six most recent faults
- Standardized copper suction tube stub length
- 7mm tubes designed with patented grooves to maximize heat transfer
- 21" depth for easier attic access
- Single front access panel
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Rust resistant, thermoplastic drain pans featuring a low water-retention design
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Drain pan rails designed to remove and reposition coils with ease without compromising structural integrity
- UV-resistant drain pan
- AHRI certified; ETL listed



R32

**10 PARTS
YEAR LIMITED
WARRANTY***

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.



CAPTA*3 (R-32) | EVAPORATOR COIL

PAINTED CASED | INTERNAL TXV | UPFLOW / DOWNFLOW

EVAPORATOR
COILS

Model	Dimensions			Nominal Tons	Connection		Ship Weight (lbs)
	W"	D"	H"		Liquid"	Suction"	
CAPTA1818A3	14"	21"	18"	1½	¾"	¾"	30
CAPTA1818B3	17½"	21"	18"	1½	¾"	¾"	35
CAPTA2422A3	14"	21"	22"	1½ - 2	¾"	¾"	37
CAPTA2422B3	17½"	21"	22"	1½ - 2	¾"	¾"	40
CAPTA2422C3	21"	21"	22"	1½ - 2	¾"	¾"	43
CAPTA3022A3	14"	21"	22"	2 - 2½	¾"	¾"	37
CAPTA3022B3	17½"	21"	22"	2 - 2½	¾"	¾"	40
CAPTA3022C3	21"	21"	22"	2 - 2½	¾"	¾"	43
CAPTA3026B3	17½"	21"	26"	1½ - 2½	¾"	7/8"	46
CAPTA3026C3	21"	21"	26"	1½ - 2½	¾"	7/8"	51
CAPTA3626B3	17½"	21"	26"	2 - 3	¾"	7/8"	48
CAPTA3626C3	21"	21"	26"	2 - 3	¾"	7/8"	51
CAPTA4230C3	21"	21"	30"	2½ - 3½	¾"	7/8"	66
CAPTA4230D3	24½"	21"	30"	2½ - 3½	¾"	7/8"	70
CAPTA6030C3	21"	21"	30"	3½ - 5	¾"	7/8"	66
CAPTA6030D3	24½"	21"	30"	3½ - 5	¾"	7/8"	70

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- All-Aluminum evaporator coil
- Optimized for use with R-32 refrigerant including circuits and manifolds
- R-32 sensor designed for the life span of the coil
- Factory-installed thermal expansion valves for cooling and heat pump applications
- Standardized copper suction tube stub length
- 21" depth for easier attic access
- Single front access panel
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Rust resistant, thermoplastic drain pans featuring a low water-retention design
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Drain pan rails designed to remove and reposition coils with ease without compromising structural integrity
- UV-resistant drain pan
- AHRI certified; ETL listed



R32

**10 PARTS
YEAR LIMITED
WARRANTY***

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.

CHPTA*3 (R-32) | EVAPORATOR COIL



PAINTED CASE | INTERNAL TXV | HORIZONTAL

Model	Dimensions			Nominal Tons	Connection		Ship Weight (lbs)
	W"	D"	H"		Liquid"	Suction"	
CHPTA1822A3	22"	21"	14"	1½	¾"	¾"	46
CHPTA1822B3	22"	21"	17½"	1½	¾"	¾"	50
CHPTA2426B3	26"	21"	17½"	1½ - 2	¾"	7/8"	55
CHPTA2426C3	26"	21"	21"	1½ - 2	¾"	7/8"	57
CHPTA3026B3	26"	21"	17½"	2 - 2½	¾"	7/8"	59
CHPTA3026C3	26"	21"	21"	2 - 2½	¾"	7/8"	62
CHPTA3630B3	30"	21"	17½"	2½ - 3	¾"	7/8"	66
CHPTA3630C3	30"	21"	21"	2½ - 3	¾"	7/8"	70
CHPTA4230C3	30"	21"	21"	2½ - 3½	¾"	7/8"	70
CHPTA4830C3	30"	21"	21"	3½ - 4	¾"	7/8"	78
CHPTA6030D3	30"	21"	24½"	4 - 5	¾"	7/8"	82

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- All-Aluminum evaporator coil
- Optimized for use with R-32 refrigerant including circuits and manifolds
- R-32 sensor designed for the life span of the coil
- Factory-installed thermal expansion valves for cooling and heat pump applications
- 7mm tubes designed with patented grooves to maximize heat transfer
- Standardized copper suction tube stub length
- 21" depth for easier attic access
- Single front access panel
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Rust resistant, thermoplastic drain pans featuring a low water-retention design
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Drain pan rails designed to remove and reposition coils with ease without compromising structural integrity
- UV-resistant drain pan
- AHRI certified; ETL listed



R32

10 YEAR LIMITED PARTS WARRANTY*

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply. refer to complete warranty details for full list of limitations and exclusions.



CAPEA*3** (R-32) | EVAPORATOR COIL

PAINTED CASED | EEV | UPFLOW / DOWNFLOW

EVAPORATOR
COILS

Model	Dimensions			Nominal Tons	Connection		Ship Weight (lbs)
	W"	D"	H"		Liquid"	Suction"	
CAPEA2418B3	17.5	21	18	2	1/16" or 3/8"	5/8" or 3/4"	43
CAPEA2418C3	21	21	18	2	1/16" or 3/8"	5/8" or 3/4"	45
CAPEA3022B3	17.5	21	22	2 1/2	1/16" or 3/8"	3/4" or 7/8"	48
CAPEA3022C3	21	21	22	2 1/2	1/16" or 3/8"	3/4" or 7/8"	51
CAPEA3626B3	17.5	21	26	3	1/16" or 3/8"	3/4" or 7/8"	54
CAPEA3626C3	21	21	26	3	1/16" or 3/8"	3/4" or 7/8"	57
CAPEA3626D3	24.5	21	26	3	1/16" or 3/8"	3/4" or 7/8"	62
CAPEA4830C3	21	21	30	4	3/8"	7/8" or 1 1/8"	68
CAPEA4830D3	24.5	21	30	4	3/8"	7/8" or 1 1/8"	70
CAPEA6030C3	21	21	30	5	3/8"	7/8" or 1 1/8"	75
CAPEA6030D3	24.5	21	30	5	3/8"	7/8" or 1 1/8"	78

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- All-Aluminum evaporator coil
- Optimized for use with R-32 refrigerant including circuits and manifolds
- R-32 sensor designed for the life span of the coil
- 7mm tubes designed with patented grooves to maximize heat transfer
- Factory-installed electronic expansion valve (EEV) for precise refrigerant control
- Standardized copper suction tube stub length
- 21" depth for easier attic access
- Single front access panel
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Rust resistant, thermoplastic drain pans featuring a low water-retention design
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Drain pan rails designed to remove and reposition coils with ease without compromising structural integrity
- UV-resistant drain pan
- AHRI certified; ETL listed



R32

10 YEAR LIMITED PARTS WARRANTY*

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.

CHPEA*3** (R-32) | EVAPORATOR COIL



PAINTED CASE | EEV | HORIZONTAL

Model	Dimensions			Nominal Tons	Connection		Ship Weight (lbs)
	W"	D"	H"		Liquid"	Suction"	
CHPEA2422B3	22"	21"	17.5"	2	1/8" or 3/8"	5/8" or 3/4"	56
CHPEA3026B3	26"	21"	17.5"	2 1/2	1/8" or 3/8"	3/4" or 7/8"	63
CHPEA3026C3	26"	21"	21"	2 1/2	1/8" or 3/8"	3/4" or 7/8"	67
CHPEA3626B3	26"	21"	17.5"	3	1/8" or 3/8"	3/4" or 7/8"	68
CHPEA3626C3	26"	21"	21"	3	1/8" or 3/8"	3/4" or 7/8"	70
CHPEA4830C3	30"	21"	21"	4	3/8"	7/8" or 1 1/8"	76
CHPEA4830D3	30"	21"	24.5"	4	3/8"	7/8" or 1 1/8"	78
CHPEA6030D3	30"	21"	21"	5	3/8"	7/8" or 1 1/8"	76
CHPEA6030C3	30"	21"	24.5"	5	3/8"	7/8" or 1 1/8"	78

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- All-Aluminum evaporator coil
- Optimized for use with R-32 refrigerant including circuits and manifolds
- R-32 sensor designed for the life span of the coil
- Factory-installed electronic expansion valve (EEV) for precise refrigerant control
- Standardized copper suction tube stub length
- 7mm tubes designed with patented grooves to maximize heat transfer
- 21" depth for easier attic access
- Single front access panel
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Rust resistant, thermoplastic drain pans featuring a low water-retention design
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Drain pan rails designed to remove and reposition coils with ease without compromising structural integrity
- UV-resistant drain pan
- AHRI certified; ETL listed



R32

**10 PARTS
YEAR LIMITED
WARRANTY***

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply. refer to complete warranty details for full list of limitations and exclusions.



CAUTA (R-32) | EVAPORATOR COIL

PAINTED CASED | INTERNAL TXV | UPFLOW / DOWNFLOW

EVAPORATOR
COILS


Model	Dimensions			Nominal Tons	Connection		Ship Weight (lbs)
	W"	D"	H"		Liquid"	Suction"	
CAUTA1818A3	13"	21.3"	15"	1.5	3/8"	3/4"	22
CAUTA1818B3	16.5"	21.3"	15"	1.5	3/8"	3/4"	24
CAUTA2422A3	13"	21.3"	18.3"	1.5-2.0	3/8"	3/4"	25
CAUTA2422B3	16.5"	21.3"	18.3"	1.5-2.0	3/8"	3/4"	28
CAUTA2422C3	20"	21.3"	18.3"	1.5-2.0	3/8"	3/4"	30
CAUTA3022A3	13"	21.3"	18.3"	2.0-2.5	3/8"	3/4"	25
CAUTA3022B3	16.5"	21.3"	18.3"	2.0-2.5	3/8"	3/4"	28
CAUTA3022C3	20"	21.3"	18.3"	2.0-2.5	3/8"	3/4"	30
CAUTA3026B3	16.5"	21.3"	22.3"	1.5-2.5	3/8"	7/8"	30
CAUTA3026C3	20"	21.3"	22.3"	1.5-2.5	3/8"	7/8"	34
CAUTA3626B3	16.5"	21.3"	24.4"	2.0-3.0	3/8"	7/8"	33
CAUTA3626C3	20"	21.3"	23.9"	2.0-3.0	3/8"	7/8"	35
CAUTA4230C3	20"	21.3"	27.4"	2.5-3.5	3/8"	7/8"	38
CAUTA4230D3	23.5"	21.3"	27.1"	2.5-3.5	3/8"	7/8"	40
CAUTA6030C3	20"	21.3"	27.5"	3.5-5.0	3/8"	7/8"	43
CAUTA6030D3	23.5"	21.3"	27.3"	3.5-5.0	3/8"	7/8"	46

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

■ AHRI certified; ETL listed

- All-Aluminum evaporator coil
- Optimized for use with R-32 refrigerant including circuits and manifolds
- R-32 sensor designed for the life span of the coil
- Factory-installed thermal expansion valves for cooling and heat pump applications
- 7mm tubes designed with patented grooves to maximize heat transfer
- Standardized copper suction tube stub length
- Rust resistant, thermoplastic drain pans featuring a low water-retention design
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Drain pan rails designed to remove and reposition coils with ease without compromising structural integrity
- UV-resistant drain pan

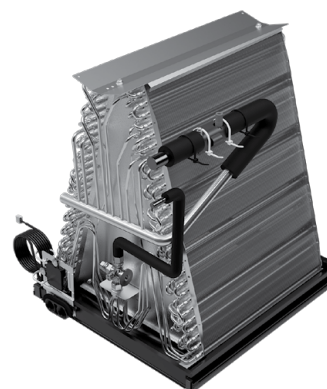

R32

**10 PARTS
YEAR LIMITED
WARRANTY***

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.

CSCT (R-32) | EVAPORATOR COIL



PAINTED CASE | INTERNAL TXV | HORIZONTAL

Model	Dimensions			Plenum Opening		Nominal Capacity Range (tons)	Coil Dimensions		Service Valve		Ship Weight (lbs)
	D"	W"	H"	D"	H"		W"	H"	Liquid"	Suction"	
CSCT2412S3	25½"	12"	25"	16"	21"	1.5-2.0	20"	24"	3/8"	3/4"	35
CSCT3012M3	33½"	12"	25"	24"	21"	2.0-2.5	28"	24"	3/8"	7/8"	42
CSCT3612L3	39½"	12"	25"	30"	21"	2.5-3.0	34"	24"	3/8"	7/8"	53
CSCT6012L3	39½"	12"	25"	30"	21"	4.0-5.0	34"	24"	3/8"	7/8"	58

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- All-Aluminum evaporator coil
- Optimized for use with R-32 refrigerant including circuits and manifolds
- R-32 sensor designed for the life span of the coil
- Compact and versatile - right or left horizontal position
- CSCT models feature a factory-installed thermal expansion valve for cooling applications
- Standardized copper suction tube stub length
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Rust resistant, thermoplastic drain pans featuring a low water-retention design
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- UV-resistant drain pan
- AHRI certified; ETL listed



R32

10 YEAR PARTS LIMITED WARRANTY*

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply. refer to complete warranty details for full list of limitations and exclusions.



PACKAGED UNITS



GPCH3 | PACKAGED AIR CONDITIONER



UP TO 13.4 SEER2 | ENERGY-EFFICIENT COMPRESSOR

Model	Nominal Ratings		SEER2/EER2	dBs	Voltage-Phase	MCA	MOP	Ship Weight (lbs)	Dimensions		
	Cooling (BTU/h)	CFM							W"	D"	H"
GPCH32431	22,800	850	13.4 / 10.6	74	208/230 - 1	17.6	25	330	66	34	30
GPCH33031	27,000	900	13.4 / 10.6	74	208/230 - 1	20.8	30	330	66	34	30
GPCH33631	36,000	1,125	13.4 / 10.6	76	208/230 - 1	24.8	35	390	66	34	35
GPCH34231	39,000	1,300	13.4 / 10.6	76	208/230 - 1	24.8	35	390	66	34	35
GPCH34831	45,000	1,450	13.4 / 10.6	76	208/230 - 1	31.0	50	390	66	34	35
GPCH36031	56,000	1,650	13.4 / 10.6	78	208/230 - 1	40.6	60	410	66	34	38½

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Energy-efficient compressor with internal relief valve
- Multi-speed ECM indoor blower motor
- Quiet horizontal discharge
- Copper tube/aluminum fin condenser coil
- All-aluminum evaporator coil
- Totally enclosed, permanently lubricated condenser fan motor
- Fully charged system
- 5 kW to 20 kW electric heat kit available as a field-installed option
- AHRI Certified; ETL listed

Cabinet Features

- Heavy-gauge galvanized-steel cabinet with attractive Architectural Gray powder-paint finish
- Louvered condenser coil protection
- Aluminum foil-facing internal insulation reinforced with fiberglass scrim
- Fully insulated blower compartment has convenient access panels
- Meets cabinet air leakage requirements when tested in accordance with ASHRAE standard 193
- One footprint for all tonnages
- When properly anchored, meets the 2020 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



**10 PARTS
YEAR LIMITED
WARRANTY***

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.



GPCM3 | PACKAGED AIR CONDITIONER

UP TO 13.4 SEER2 | ENERGY-EFFICIENT SCROLL COMPRESSOR

PACKAGED
UNITS

Model	Nominal Capacities		Electric Heat (kW)	SEER2/EER2	Voltage-Phase	MCA	MOP	Dimensions			dBs	Ship Weight (lbs)
	"Cooling (Tons)"	"Cooling (CFM)"						W"	D"	H"		
GPCM32441A*	2	800	5,8,10	13.4 / 10.6	208 / 230-1	21.6	35	47	51	34 3/4	78	319
GPCM33041A*	2½	1000	5,8,10,15	13.4 / 10.6	208 / 230-1	23	35	47	51	34 3/4	78	342
GPCM33641A*	3	1200	5,8,10,15	13.4 / 10.6	208 / 230-1	26.1	40	47	51	34 3/4	80	365
GPCM34241A*	3½	1325	5,8,10,15	13.4 / 10.6	208 / 230-1	27.7	40	47	51	42 3/4	78	435
GPCM34841A*	4	1600	5,8,10,15,20	13.4 / 10.6	208 / 230-1	31.7	50	47	51	42 3/4	82	435
GPCM36041A*	5	1700	5,8,10,15,20	13.4 / 10.6	208 / 230-1	41	60	47	51	42 3/4	80	458

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Energy-efficient compressor
- Multi-speed ECM indoor blower motor
- Convertible airflow: horizontal or downflow application
- Copper tube/aluminum fin condenser coil
- All-aluminum evaporator coil
- Totally enclosed, permanently lubricated condenser fan motor
- 5 kW to 20 kW electric heat kit available as a field-installed option
- AHRI Certified; ETL Listed

Cabinet Features

- Heavy-gauge galvanized-steel cabinet with attractive Architectural Gray powder-paint finish
- Aluminum foil-facing internal insulation reinforced with fiberglass scrim
- Fully insulated blower compartment with convenient access panels
- Meets cabinet air leakage requirements when tested in accordance with ASHRAE standard 193
- Louvered condenser coil protection
- One footprint for all tonnages
- When properly anchored, meets the 2020 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available)



10 YEAR PARTS LIMITED WARRANTY*

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.

GP HH5 | PACKAGED HEAT PUMP



UP TO 15.2 SEER2 | UP TO 6.7 HSPF2 | HIGH-EFFICIENCY SCROLL COMPRESSOR

Model	Nominal Ratings			SEER2/EER2	dBs	Voltage-Phase	MCA	MOP	Ship Weight (lbs)	Dimensions		
	Cooling (BTU/h)	Heating (BTU/h)	CFM							W"	D"	H"
GP HH52431	23600	24000	875	15 / 11.2	76	208/230 - 1	18.03	25	360	66	34	30
GP HH53031	27000	26000	1050	15.2 / 11.2	76	208/230 - 1	20.75	30	360	66	34	30
GP HH53631	32600	30000	1180	15.2 / 11.2	78	208/230 - 1	23.36	35	400	66	34	35
GP HH54231	42000	41500	1300	15.2 / 11.2	78	208/230 - 1	36.44	50	410	66	34	35
GP HH54831	45000	41500	1550	15.2 / 11.2	80	208/230 - 1	36.44	50	420	66	34	35
GP HH56031	55000	52000	1700	15.2 / 11.2	80	208/230 - 1	40.64	60	440	66	34	38½

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- High-efficiency scroll compressor
- Multi-speed ECM indoor blower motor
- Copper tube/aluminum fin condenser coil
- All-aluminum evaporator coil
- Totally enclosed, permanently lubricated condenser fan motor
- Fully charged system
- Quiet horizontal discharge
- Electric heat kit available as a field-installed option
- AHRI Certified; ETL Listed

Cabinet Features

- Heavy-gauge galvanized-steel cabinet with attractive Architectural Gray powder-paint finish
- Louvered condenser coil protection
- Aluminum foil-facing internal insulation reinforced with fiberglass scrim
- Fully insulated blower compartment with convenient access panels
- Meets cabinet air leakage requirements when tested in accordance with ASHRAE standard 193
- One footprint for all tonnages
- When properly anchored, meets the 2020 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



R32

**10 PARTS
YEAR LIMITED
WARRANTY***

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.



GPBM5 | PACKAGED HEAT PUMP

UP TO 15.2 SEER2 | UP TO 6.7 HSPF2 | HIGH-EFFICIENCY SCROLL COMPRESSOR

PACKAGED
UNITS

Model	Nominal Ratings			SEER2/EER2	dBs	Voltage-Phase	MCA	MOP	Ship Weight (lbs)	Dimensions		
	Cooling (BTU/h)	Heating (BTU/h)	CFM							W"	D"	H"
GPBM52431	24000	22600	800	14.4 / 11.4	76	208/230 - 1	18.7	25	376	47	51	34 ³ / ₄
GPBM53031	29600	28600	980	15.2 / 11.4	76	208/230 - 1	21.5	30	385	47	51	34 ³ / ₄
GPBM53631	36000	35500	1200	15.2 / 11.4	76	208/230 - 1	22.8	35	492	47	51	42 ³ / ₄
GPBM54231	42000	41000	1275	15 / 11.4	78	208/230 - 1	31.7	50	492	47	51	42 ³ / ₄
GPBM54831	45500	41000	1575	15.2 / 11.4	78	208/230 - 1	33.3	50	492	47	51	42 ³ / ₄
GPBM56031	60000	59000	1950	15.4 / 11.6	78	208/230 - 1	39	60	688	73 ³ / ₈	47 ⁵ / ₈	43 ¹ / ₂

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- High-efficiency two-stage scroll compressor
- Two-stage heating and cooling
- Multi-Speed ECM indoor blower motor
- Copper tube/aluminum fin condenser coils
- All-aluminum evaporator coil on 2- to 4-ton units
- Aluminum-copper evaporator coil on 5-ton units
- Liquid-line filter drier
- Convertible airflow: horizontal or downflow
- Electric heat kit available as a field-installed option
- AHRI Certified; ETL Listed

Cabinet Features

- Heavy-gauge galvanized-steel cabinet with attractive two-tone Architectural Gray powder-paint finish
- Aluminum foil-facing internal insulation reinforced with fiberglass scrim
- Fully insulated air-handling compartment with convenient access panels
- Louvered condenser coil protection
- Meets cabinet air leakage requirements when tested in accordance with ASHRAE standard 193
- When properly anchored, meets the 2020 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available)



R32

10 YEARS PARTS LIMITED WARRANTY*

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.

GPHH3 | PACKAGED HEAT PUMP



UP TO 13.4 SEER2 | 6.7 HSPF2 | ENERGY-EFFICIENT SCROLL COMPRESSOR

Model	Nominal Ratings			SEER2/EER2	dBs	Voltage-Phase	MCA	MOP	Ship Weight (lbs)	Dimensions		
	Cooling (BTU/h)	Heating (BTU/h)	CFM							W"	D"	H"
GPHH32431	24,000	24,000	800	13.4 / 10.6	76	208/230 - 1	20.75	30	340	66	34	30
GPHH33031	28,200	27,200	1050	13.4 / 10.6	76	208/230 - 1	20.75	30	340	66	34	30
GPHH33631	36,000	33,800	1,225	13.4 / 10.6	78	208/230 - 1	23.2	35	380	66	34	35
GPHH34231	39,000	35,000	1,250	13.4 / 10.6	78	208/230 - 1	23.2	35	400	66	34	35
GPHH34831	45,000	42,500	1,500	13.4 / 10.6	80	208/230 - 1	31.04	50	425	66	34	35
GPHH36031	56,000	54,000	1650	13.4 / 10.6	80	208/230 - 1	36.64	60	450	66	34	38½

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Energy-efficient scroll compressor
- Multi-speed ECM indoor blower motor
- Quiet horizontal discharge
- All-aluminum evaporator coil
- Copper tube/aluminum fin condenser coil
- Totally enclosed, permanently lubricated condenser fan motor
- Fully charged system
- Electric heat kit available as a field-installed option
- AHRI certified; ETL listed

Cabinet Features

- Heavy-gauge galvanized-steel cabinet with architectural gray powder-paint finish
- Aluminum foil-facing internal insulation reinforced with fiberglass scrim
- Fully insulated blower compartment with convenient access panels
- Meets cabinet air leakage requirements when tested in accordance with ASHRAE standard 193
- Louvered condenser coil protection
- One footprint for all tonnages
- When properly anchored, meets the 2020 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



R32

**10 PARTS
YEAR LIMITED
WARRANTY***

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.



GPBM3 | PACKAGED HEAT PUMP

UP TO 13.4 SEER2 | 6.7 HSPF2 | ENERGY-EFFICIENT SCROLL COMPRESSOR

PACKAGED
UNITS

Model	Nominal Ratings			SEER2/EER2	dBs	Voltage-Phase	MCA	MOP	Ship Weight (lbs)	Dimensions		
	Cooling (BTU/h)	Heating (BTU/h)	CFM							W"	D"	H"
GPBM32431	24,000	22,000	800	13.4 / 10.6	76	208/230 - 1	18.48	25	390	47	51	34 ³ / ₄
GPBM33031	27,400	26,000	1,025	13.4 / 10.6	76	208/230 - 1	21.2	30	395	47	51	34 ³ / ₄
GPBM33631	33,400	31,400	1,150	13.4 / 10.6	80	208/230 - 1	25.76	40	420	47	51	34 ³ / ₄
GPBM34231	39,000	37,000	1,250	13.4 / 10.6	80	208/230 - 1	27.52	40	480	47	51	42 ³ / ₄
GPBM34831	46,500	45,500	1600	13.4 / 10.6	79	208/230 - 1	31.64	50	490	47	51	42 ³ / ₄
GPBM36031	55,000	54,000	1750	13.4 / 10.6	80	208/230 - 1	42.84	60	500	47	51	42 ³ / ₄

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Energy-efficient scroll compressor
- Multi-speed ECM indoor blower motor
- Convertible airflow: horizontal or downflow
- Copper tube/aluminum fin condenser coil
- All-Aluminum evaporator coil
- Electric heat kit available as a field-installed option
- AHRI Certified; ETL Listed

Cabinet Features

- Heavy-gauge galvanized-steel cabinet with attractive Architectural Gray powder-paint finish
- Aluminum foil-facing internal insulation reinforced with fiberglass scrim
- Fully insulated air-handling compartment with convenient access panels
- Meets cabinet air leakage requirements when tested in accordance with ASHRAE standard 193
- Louvered condenser coil protection
- One footprint for all tonnages
- When properly anchored, meets the 2020 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



R32

10 YEARS PARTS LIMITED WARRANTY*

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.

GPGM5 | PACKAGED GAS / ELECTRIC UNIT



UP TO 15.2 SEER | 81% AFUE | HIGH-EFFICIENCY SCROLL COMPRESSOR

Model	Nominal Ratings			SEER2/ EER2	dBs	Voltage- Phase	MCA	MOP	Ship Weight (lbs)	Dimensions		
	Cooling (BTU/h)	Heating (BTU/h)	CFM							W"	D"	H"
GPGM52406031	23800	60,000 / 45,000	800	15.2 / 11.5	78	208/230 - 1	17.2	25	380	47	51	34½
GPGM53008031	29400	80,000 / 60,000	950	14.8 / 11.5	73	208/230 - 1	21.4	30	380	47	51	34½
GPGM53608031	35600	80,000 / 60,000	1200	15.2 / 11.5	76	208/230 - 1	25	35	410	47	51	42½
GPGM54210031	41500	100,000 / 75,000	1250	15.2 / 11.5	76	208/230 - 1	29.8	45	410	47	51	42½
GPGM54810031	46000	100,000 / 75,000	1300	15.2 / 11.5	77	208/230 - 1	35.8	50	410	47	51	42½
GPGM56014031	59000	135,000 / 101,250	2000	15.4 / 11.5	78	208/230 - 1	43.3	70	410	73⅞	47⅝	42½

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Durable, corrosion-resistant T-140 aluminized steel tubular heat exchanger
- High-efficiency two-stage scroll compressor
- Convertible airflow: horizontal or downflow application
- Variable-speed ECM indoor blower motor
- Copper tube/aluminum fin condenser coil
- All-aluminum evaporator coil on 2- to 4-ton units
- Aluminum-copper evaporator coil on 5-ton units
- Power-assisted combustion
- Loss-of-charge protection & high-pressure switch
- Two-stage gas valve; natural gas with easy conversion to propane with accessory kit
- Direct spark ignition system includes a microprocessor-based control for the entire ignition sequence
- All blower operation and all safety circuits complete with self-diagnostics
- All models comply with California Low NOx emission standards (40ng/J NOx)
- This furnace does not comply with the SCAQMD Rule 1111 nor the SJVAPCD Rule 4905 14 ng/J NOx emission limit and therefore is not eligible for installation in California's South Coast Air Quality Management District (SCAQMD) nor the San Joaquin Valley Air Pollution Control District (SJVAPCD)
- AHRI Certified; ETL Listed

Cabinet Features

- Fully insulated heavy-gauge, zinc-coated steel cabinet with UV-resistant powder-paint finish
- Aluminum foil-facing internal insulation reinforced with fiberglass scrim
- Convenient access panels
- One roof curb fits 2-4 ton units
- Bottom, 2" high base rails for easier handling
- 2-4 ton models fit a standard-size pick-up truck
- When properly anchored, meets the 2020 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)
- Meets cabinet air leakage requirements when tested in accordance with ASHRAE standard 193



R32

10 YEAR PARTS LIMITED WARRANTY*

20 YEAR HEAT EXCHANGER LIMITED WARRANTY*

* Complete warranty details available from your local dealer or at www.goodmanmfg.com. To receive the 20-Year Heat Exchanger Limited Warranty (good for as long as you own your home), and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.



GPGM3 | PACKAGED GAS / ELECTRIC UNIT

UP TO 13.4 SEER2 | 81% AFUE | ENERGY-EFFICIENT SCROLL COMPRESSOR

PACKAGED
UNITS

Model	Nominal Ratings			SEER2/ EER2	dBs	Voltage- Phase	MCA	MOP	Ship Weight (lbs)	Dimensions		
	Cooling (BTU/h)	Heating (BTU/h)	CFM							W"	D"	H"
GPGM32404031	22,800	40,000	760	13.4 / 10.6	78	208/230 - 1	17.6	25	380	47	51	34½
GPGM32406031	22,800	60,000	760	13.4 / 10.6	78	208/230 - 1	17.6	25	380	47	51	34½
GPGM33004031	28,600	40,000	1,000	13.4 / 10.6	76	208/230 - 1	21.2	30	410	47	51	34½
GPGM33006031	28,600	60,000	1,000	13.4 / 10.6	76	208/230 - 1	21.2	30	410	47	51	34½
GPGM33604031	33,800	40,000	1,150	13.4 / 10.6	76	208/230 - 1	22	35	410	47	51	34½
GPGM33606031	33,800	60,000	1,150	13.4 / 10.6	76	208/230 - 1	22	35	410	47	51	34½
GPGM33608031	33,800	80,000	1,150	13.4 / 10.6	76	208/230 - 1	22	35	410	47	51	34½
GPGM34206031	39,000	60,000	1,250	13.4 / 10.6	78	208/230 - 1	24.8	35	470	47	51	42½
GPGM34208031	39,000	80,000	1,250	13.4 / 10.6	78	208/230 - 1	24.8	35	470	47	51	42½
GPGM34806031	46,000	60,000	1,525	13.4 / 10.6	79	208/230 - 1	31.6	50	460	47	51	42½
GPGM34808031	46,000	80,000	1,525	13.4 / 10.6	79	208/230 - 1	31.6	50	460	47	51	42½
GPGM34810031	46,000	100,000	1,525	13.4 / 10.6	79	208/230 - 1	31.6	50	460	47	51	42½
GPGM36008031	56,000	80,000 / 64,800	1,700	13.4 / 10.6	81	208/230 - 1	42.8	60	510	47	51	42½
GPGM36010031	56,000	100,000 / 81,000	1,700	13.4 / 10.6	81	208/230 - 1	42.8	60	510	47	51	42½
GPGM36012031	56,000	120,000 / 97,200	1,700	13.4 / 10.6	81	208/230 - 1	42.8	60	510	47	51	42½

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Energy-efficient scroll compressor
- Multi-speed ECM indoor blower motor
- Convertible airflow: horizontal or downflow application
- All-aluminum evaporator coil
- Power-assisted combustion
- Direct spark ignition system includes a microprocessor-based control for the entire ignition sequence, all blower operation, and all safety circuits complete with self-diagnostics
- All models comply with California Low NOx standards (40ng/J NOx)
- This furnace does not comply with the SCAQMD Rule 1111 nor the SJVAPCD Rule 4905 14 ng/J NOx emission limit and therefore is not eligible for installation in California's South Coast Air Quality Management District (SCAQMD) nor the San Joaquin Valley Air Pollution Control District (SJVAPCD)
- AHRI Certified; ETL Listed

Cabinet Features

- High-quality UV-resistant powder-paint finish
- Aluminum foil-facing internal insulation reinforced with fiberglass scrim
- Convenient access panels
- One roof curb fits all units
- Fully insulated cabinet
- Bottom, 2" high base rails for easier handling
- Meets cabinet air leakage requirements when tested in accordance with ASHRAE standard 193
- One footprint for all tonnages



R32

**10 PARTS
YEAR LIMITED
WARRANTY***

**20 HEAT
YEAR EXCHANGER
LIMITED
WARRANTY***

* Complete warranty details available from your local dealer or at www.goodmanmfg.com. To receive the 20-Year Heat Exchanger Limited Warranty (good for as long as you own your home), and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.



GPUM3 | PACKAGED GAS/ELECTRIC UNIT

UP TO 13.4 SEER2 | ULTRA-LOW NOX | 81% AFUE | ENERGY-EFFICIENT SCROLL COMPRESSOR

Model	Nominal Ratings			SEER2/ EER2	dBs	Voltage- Phase	MCA	MOP	Ship Weight (lbs)	Dimensions		
	Cooling (BTU/h)	Heating (BTU/h)	CFM							W"	D"	H"
GPUM32404031	22800	40000	760	13.4 / 10.6	78	208/230 - 1	17.6	25	380	47	51	34½
GPUM33006031	28600	60000	1000	13.4 / 10.6	76	208/230 - 1	21.2	30	410	47	51	34½
GPUM33606031	33800	60000	1150	13.4 / 10.6	76	208/230 - 1	22	35	410	47	51	34½
GPUM34208031	39000	80000	1250	13.4 / 10.6	78	208/230 - 1	24.8	35	470	47	51	42½
GPUM34808031	46000	80000	1525	13.4 / 10.6	79	208/230 - 1	31.6	50	460	47	51	42½
GPUM36008031	56000	80,000 / 64,800	1700	13.4 / 10.6	81	208/230 - 1	42.8	60	510	47	51	42½

Daikin Comfort Technologies Manufacturing, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Standard Features

- Heavy-duty stainless-steel heat exchanger
- Energy-efficient scroll compressor
- Multi-speed ECM indoor blower motor
- Convertible airflow: horizontal or downflow application
- All-aluminum evaporator coil
- Power-assisted combustion
- Direct spark ignition system includes a microprocessor-based control for the entire ignition sequence, all blower operation, and all safety circuits complete with self-diagnostics
- California Ultra-Low NOx emissions compliant
- Eligible for installation in California's South Coast Air Quality Management District (SCAQMD) and San Joaquin Valley Air Pollution Control District (SJVUAPCD). This gas packaged unit furnace complies with the 14 ng/J NOx emission limit in SCAQMD Rule 1111 and SJVUAPCD Rule 4905. This gas packaged unit furnace is eligible for the SCAQMD Clean Air Furnace Rebate Program: www.CleanAirFurnaceRebate.com
- AHRI Certified; ETL Listed

Cabinet Features

- High-quality UV-resistant powder-paint finish
- Aluminum foil-facing internal insulation reinforced with fiberglass scrim
- Convenient access panels
- One roof curb fits all units
- Fully insulated cabinet
- Bottom, 2" high base rails for easier handling
- Meets cabinet air leakage requirements when tested in accordance with ASHRAE standard 193
- One footprint for all tonnages



R32

10 PARTS
YEAR LIMITED
WARRANTY*

20 HEAT
YEAR EXCHANGER
LIMITED
WARRANTY*

* Complete warranty details available from your local dealer or at www.goodmanmfg.com. To receive the 20-Year Heat Exchanger Limited Warranty (good for as long as you own your home), and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.



CONTROLS & THERMOSTATS

GOODMAN GTST CONNECTED THERMOSTAT


BUILT-IN WI-FI

Standard Features

- Compact, non-intrusive design suitable for most interior environments
- Multifunction push buttons labeled for mode, fan, set-point up, set-point down
- Wi-Fi-enabled connected thermostat that works with *SkyportHome* app (iOS and Android)
- Voice control by Amazon Alexa and Google Assistant
- Programmable schedule
- Built-in temperature and humidity sensors
- Indoor unit Control: Mode (Auto/Heat/Cool/AUX Heat/Emergency Heat), Setpoint (Dual/Single), Fan Speed, Fan On/Auto (with minimum run time)
- LED Mode indicator for heating and cooling
- Dehumidification function (setup with *SkyportHome* app)
- Error and maintenance notifications
- Control and comfort functions: Away mode and geo-fencing
- Over-the-air software update capable (requires Wi-Fi connection)
- Compatible with *SkyportCare*
- Setup using buttons is possible, but not recommended.

Technical Specifications

- Backlit, 3.5 inch MVA TFT LCD display
- Bi-directional communications protocol for controlling HVAC system
- Multi-language support: English, Spanish, French (Goodman GTST home app only)
- 1 Auxiliary output configurable as a secondary heat source, dehumidifier, or humidifier
- FCC Certified/UL Listed
- An optional trim plate (PSPAC-WPM-L) is available.

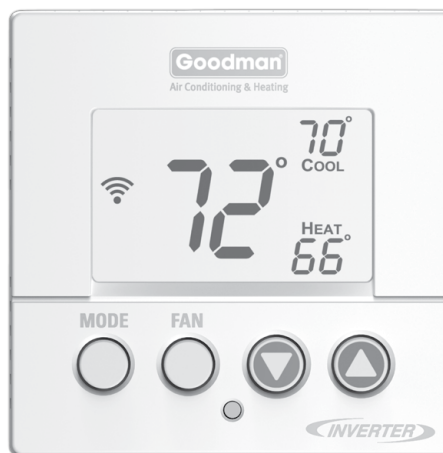

10 YEAR PARTS LIMITED WARRANTY*

* Complete warranty available from your local dealer or at www.goodmanmfg.com. To receive 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. The duration of warranty coverage may depend on the state in which you reside. Some states and provinces do not allow warranty coverage to be conditioned on registration. For a list of states and provinces that do not allow warranty coverage to be conditioned on registration, please visit www.goodmanmfg.com/warranty-information or, to request a paper copy of this information, please call us at 1-855-502-3903. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.





SkyportHome

PSP | UNIVERSAL SMART WI-FI THERMOSTATS

LARGE DISPLAY WITH BRIGHT BLUE BACKLIGHT

Model	
PSP1100	PS 1H/1C NON-PRG LED
PSP1152	PS 1H/1C 5+2 DAY PRG LED
PSP2100	PS 2H/1C NON-PRG HP LED
PSP2111	PS 2H/1C 7-DAY PRG OPT WIFI
PSP2152	PS 2H/1C 5+2 DAY PRG HP LED
PSP2270	PS 2H/2C 7-DAY PRG WIFI
PSP4272	PS 4H/2C 7-DAY PRG OPT WIFI
PSP4272RT	PS 4H/2C 7-DAY PRG WIFI
PSP4273	PS 4H/2C 7-DAY PRG HUM/DEH
PSP4273RT	PS 4H/2C 7-DAY PRG WIFI & HM/DE
PSPAC-AW	PS ADD-A-WIRE
PSPAC-DS	PS DUCT SENSOR
PSPAC-LR	PS LOCK RING
PSPAC-OS	PS TEMP SENSOR COLORTOUCH SCRNM
PSPAC-PWF	PS PREMIUM THERMOSTAT WIFI KEY
PSPAC-WP	PS WALL PLATE PREM/VALUE SRS
PSPAC-WPM-L	PS WALL PLATE PREM MINI - LRG
PSPAC-WPT	PS WALL PLATE COLORTOUCH SCRNM
PSPAC-WS	PS WIRED SENSOR

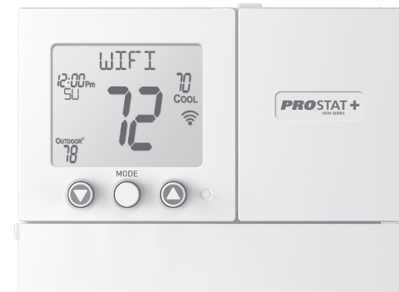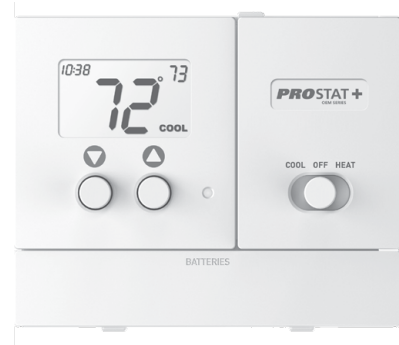

5 YEAR
LIMITED
WARRANTY*

* Complete warranty details available from your local branch.

CLEAN COMFORT IAQ SOLUTIONS

WHOLE HOME IAQ SOLUTIONS

Our complete family of Clean Comfort® products helps to improve indoor air quality.

Clean Comfort Indoor Air Essentials can help improve the quality and comfort of your home's indoor air. Components can be installed on virtually any brand of HVAC equipment in any home or installation.

LEARN MORE AT
www.cleancomfort.com



Filtration

HEPA bypass filtration cleans air to a high-quality standard removing 99.97% of all particles as small as 0.3 microns. Media air cleaners are a more efficient and convenient way to clean the air than standard filters. Both options may help to remove dust, lint, and other particulates.



Humidification

Whole-home humidifiers add moisture to the conditioned air flowing through the home. Premium steam humidifiers help maintain comfortable humidity levels utilizing electrode and canister technology. Evaporative humidifiers use the warm furnace air to circulate evaporated moisture.



Dehumidification

Whole-home dehumidifiers remove moisture from your home's air, helping to keep the indoor environment comfortable. The dehumidifier can work in conjunction with your central AC system or independently as needed, automatically maintaining suitable year-round humidity levels.



Purification

Ultraviolet (UV) light is an effective method to inhibit the growth of microbes such as mold, bacteria, and viruses. Air purifiers harness the power of UV, increasing disinfection power in the airstream. UV coil purifiers bask the coil with UV light and help to keep the evaporator coil clean.



Ventilation

Heat Recovery Ventilators (HRV) and Energy Recovery Ventilators (ERV) offer a simple, energy-efficient solution for ventilating well-insulated homes. HRV and ERV products keep you comfortable and may save energy by using the stale indoor air exhaust to condition fresh incoming air.



Zoning

A zoned residential HVAC system redirects air to specific areas of the home, allowing for the creation of customized temperature zones for increased comfort. Advanced, integrated controls monitor the system static pressure to reduce air noise and assure adequate system airflow.

CLEAN COMFORT®
INDOOR AIR ESSENTIALS

PURE. CLEAN. AIR.

This image shows a full page of blank, lined paper. It features approximately 28 horizontal grey lines spaced evenly apart, typical of notebook paper. The lines extend across the entire width of the page, leaving small margins at the top and bottom. There are no vertical lines, text, or other markings present.

ONCE YOU CHOOSE THE GOODMAN BRAND, YOU'LL PROBABLY BE A FAN FOR LIFE.



Millions across North America are big fans already.
Once you choose a Goodman brand, you'll probably be a big fan, too!
See why others are saying, "Thank Goodness for Goodman®."

Just go to www.goodmanmfg.com/reviews

ComfortBridge™
technology

HVAC Communicating Control

ComfortBridge technology offers off-the-wall smart communicating systems capable of customizing energy-efficient performance, use of any single-stage thermostat, and more.



www.comfortbridge.com

CLEAN COMFORT®
INDOOR AIR ESSENTIALS

Pure. Clean. Air.

Indoor comfort in your home is about more than just adjusting the temperature on the thermostat. Many homeowners overlook the need for necessary components and systems that can improve the indoor air you breathe.



www.cleancomfort.com

GOODMAN IS SOCIAL!

 Like us on **Facebook!**
facebook.com/GoodmanMfg

 Follow us on **X!**
x.com/Goodman_Mfg

 Follow us on **Instagram!**
instagram.com/Goodman_Mfg

Additional Information

Before purchasing this appliance, read important information about its estimated annual energy consumption, yearly operating cost, or energy efficiency rating that is available from your retailer.

WARNINGS:

Always use a licensed installer or contractor to install this product. Do not try to install the product yourself. Improper installation can result in water or refrigerant leakage, electrical shock, fire or explosion.

Use only those parts and accessories supplied or specified by the manufacturer. Ask a licensed contractor to install those parts and accessories. Use of unauthorized parts and accessories or improper installation of parts and accessories can result in water or refrigerant leakage, electrical shock, fire or explosion.

Read the Product Manuals carefully before using this product. The Product Manuals provide important safety instructions and warnings. Be sure to follow these instructions and warnings.

For any inquiries, contact your local Goodman brand sales office.

Goodman

Air Conditioning & Heating

A DAIKIN BRAND

Our continuing commitment to quality products may mean a change in specifications without notice.

© 2026 DAIKIN COMFORT TECHNOLOGIES NORTH AMERICA, INC.

Houston, Texas · USA · www.goodmanmfg.com

