


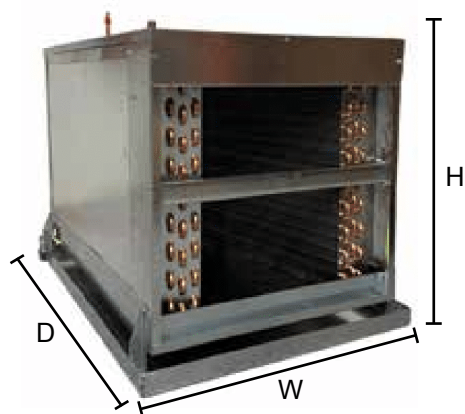

Representative image only. Some models may vary in appearance.
Due to continuous product improvement, specifications are subject to
change without notice.


Product Features and Specifications

- Rifled copper tubing, enhanced aluminum fins.
- Immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Liquid line - $\frac{3}{8}$ " OD, suction line - $\frac{3}{4}$ " OD on 1-1/2- 3 ton and $\frac{7}{8}$ " OD on 3-1/2 - 5 ton.
- Refrigerant lines exit from the top of the coil with Schrader valve for hiss-testing.
- Three-piece access doors on top of the coil for easy service.
- Fully insulated cabinet with plenum sides and back constructed of foil-backed, faced, one-inch thick, fiberglass duct board.
- Heavy duty plastic pan with 4- $\frac{3}{4}$ " NPT condensate drains on each side of the coil.
- Secondary metal drain pan included with one inch spacing around the cabinet for turnkey installation.
- AHRI certifiable with all brands of A/C and heat pump systems.
- ETL listed for use with R-22, R-410A, R-454B, and R-32 when proper metering device is used.
- Ten-year limited warranty with registration.

COIL MODEL	NOMINAL CAPACITY (BTUs)	DIMENSIONS					SHIPPING INFORMATION					
		CABINET			RETURN		WEIGHT (LBS)		SKID QTY			
		WIDTH (W")	DEPTH (D")	MAX. HEIGHT (H")	WIDTH (D")	HEIGHT (E")	3 ROW	4 ROW				
CP25A*	25,000	21	28	14-1/2	20	13-1/2	37	41	16			
CP25B*				15		14	39	44				
CP25E*				17-1/2		16-1/2	52	59				
CP31A*	31,000			15		14	39	44				
CP31E*				17-1/2		16-1/2	52	59				
CP37A*	37,000			15		14	39	44				
CP37B*				17-1/2		16-1/2	49	55				
CP37C*							43	49				
CP37D*				33		21		20	68	77	6	
CP37E*				28					58	67	12	
CP37F*	17-1/2		16-1/2	40		47	16					
CP43C*	43,000		33	21		20	60	69	12			
CP43D*							67	76	6			
CP49A*	49,000		28	17-1/2		16-1/2	51	58	16			
CP49B*				21		20	58	66	12			
CP49C*								67				
CP49D*			33				68	77	6			
CP61A*	61,000		28				60	69				
CP61B*			33				68	77				
CP61C*			24-1/2	23-1/2		79	92					
CP61D*			25			24	81	93				
CP61E*							83	97				
CP61F*			28	24-1/2		23-1/2	53	60				

CP SERIES

DEDICATED HORIZONTAL PLENUM COIL
WITH AUXILIARY DRAIN PAN

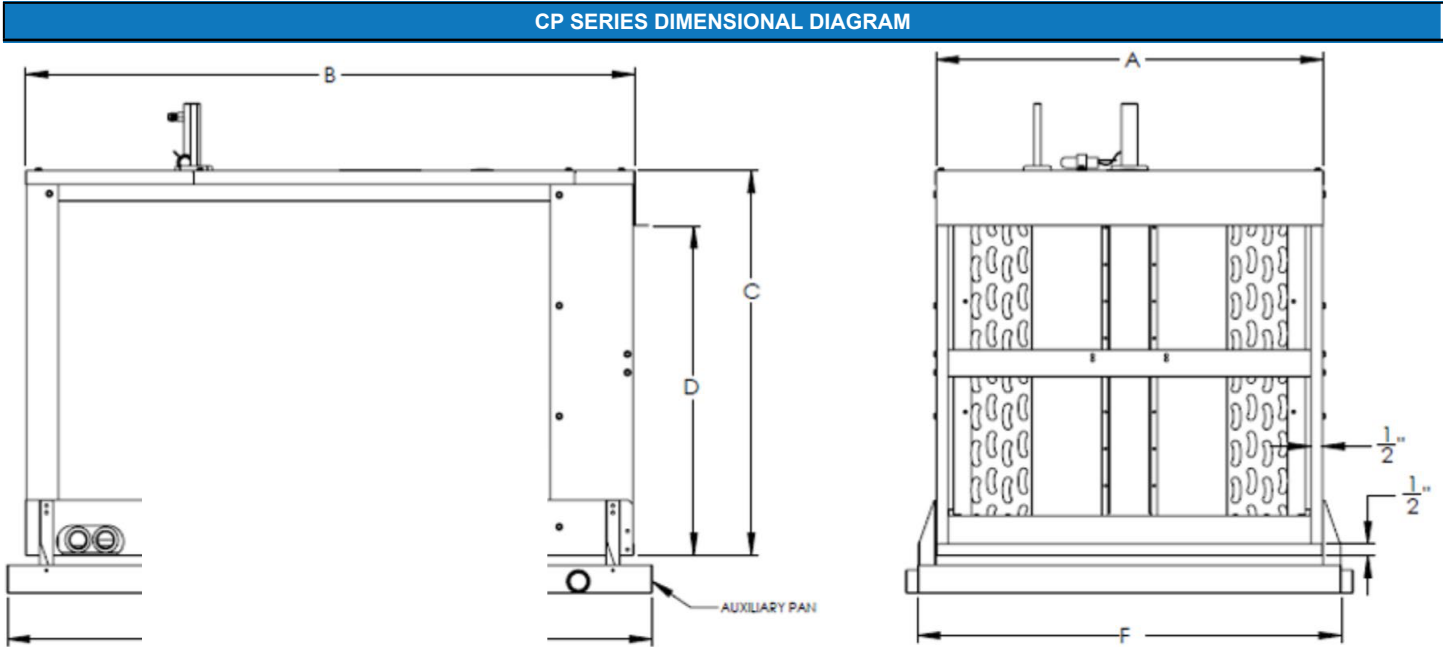

DRAIN PAN TEMPERATURE TABLE	
DRAIN PAN TYPE	TEMP LIMITS
Plastic - Standard	290°
Plastic - High Temp	425°
Metal - High Temp	600°